


Gestensteuerung für VARDaFlex ProxiDimmer Select für Aluprofile-CV

Article nr.: 80601

LED dimmer for installation in aluminum profiles for dynamic white lighting · (such as tunable white, Select, CCT) · for indoor use, IP20 · with self-adhesive backing · 2 channel 5 A · Protection class III, CE, RoHS · Input: DC 12 V - DC 24 V · Output: DC 12 V - DC 24 V (PWM) · Power: 72 W (12 V), 144 W (24 V) · LxWxH in mm: 30 x 10 x 2.7 · with 100 mm input and output line · Temperature range 0° C to + 40 ° C · scope of delivery: 1 ProxiDimmer Select · A short detection changes the switching state on / off · A long detection continuously dims between minimum and maximum threshold · A short and then a long detection changes the color temperature · OEM rutech with label + bag

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094806013
Housing colour	sonstige
Length	40.00 mm
Width	10.00 mm
Height	2.70 mm
Lamp	Ohne
IP rating	20
Power	72-144 W
Current mA	6.000 mA

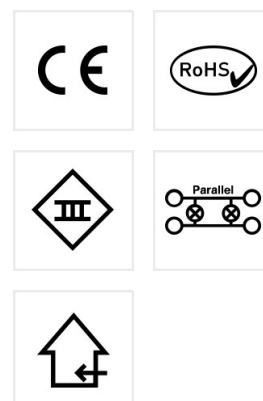



Gestensteuerung für VARDaFlex ProxiDimmer Select für Aluprofile-CV

Article nr.: 80601

TECHNICAL DATA

Input voltage	12-24
Output voltage	12-24
Material	ohne (Platinenmontage)
Temperature range	to 40

