




Einfarbig, Select, RGB, RGBW Master Funkempf.350mA 4, 2W/8, 4W Article nr.: 80440

The RF receiver is able to control 1-4 coloured LEDs · The synchronization of the RF receiver takes place via 3-pole data bus, · which can be led up to 30 m from controller to controller · for indoor use · Material: plastic · IP20 · Protection class III, CE, RoHS, REACH · Input voltage: 12 V or 24 V DC · Output current: 4 x 350 mA · Power: 4 x 4.2 W with 12 V / 4 x 8.4 W with 24 V · Carrier frequency: 868 MHz · Maximum cable cross-section at terminal: 1.5 sq mm · Synchronization via 3-pole data bus · with memory effect · up to 8 hand transmitter can be saved

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094804408
Housing colour	Blau
Length	166.00 mm
Width	53.40 mm
Height	28.00 mm
Lamp	Ohne
IP rating	20
Power	16,8-33,6 W
Current mA	350 mA

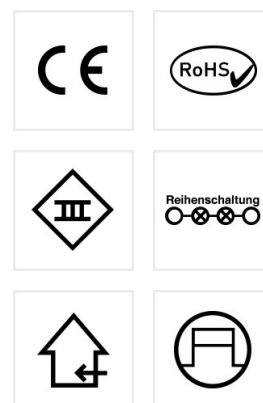



Einfarbig, Select, RGB, RGBW Master
Funkempf.350mA 4, 2W/8, 4W
Article nr.: 80440

TECHNICAL DATA

Input voltage	12-24
Output voltage	12-24
Material	Kunststoff
Efficiency	98.00
Temperature range	-20 - 50

