




**220-240V AC, Phasenanschnitt LED**  
**Netzgerät 24V 100-300W IP67 dimmbar**  
 Article nr.: 85481

rutec dimmable LED power supply, constant voltage · for indoor and outdoor use, IP67 · CE, REACH, RoHS, SELV, active PFC · protection class I · protection against short circuit, overload, overtemperature and overvoltage · primary and secondary sided 1 input and output line approx. 300 mm · housing: aluminum · input voltage: 220-240V AC · Power: 100-300 watt · output current: 4.16-12.5 A · output voltage: 24 Volt · LxWxH in mm: 270 x 98 x 38.5 · temperature range: -30 to +50 °C · dimmable on primary side via TRIAC dimmer · dimming range: 3-100% (depending on the dimmer used)

**TECHNICAL DATA**

Unit Code	pcs
BAR code	4012094854816
Housing colour	Aluminium
Length	270.00 mm
Width	98.00 mm
Height	38.50 mm
Lamp	Ohne
IP rating	67
Power	100-300 W
Psb	0,00 W

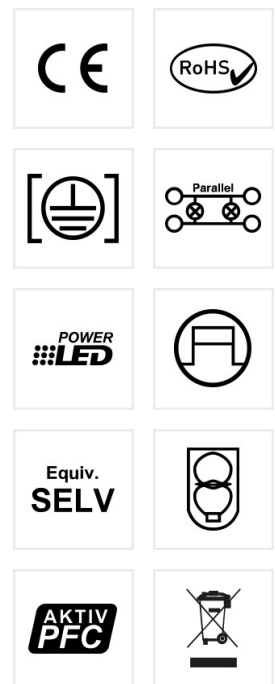




**220-240V AC, Phasenanschnitt LED**  
**Netzgerät 24V 100-300W IP67 dimmbar**  
Article nr.: 85481

**TECHNICAL DATA**

Pno	0,48 W
Current mA	4.166-12.500 mA
Input voltage	220-240
Output voltage	24
Material	Aluminium
Tolerance	5.00
Temperature range	-30 - 50
Suitable light source	LED

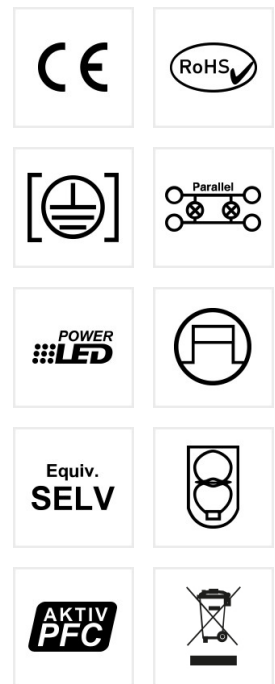



**220-240V AC, Phasenanschnitt LED**  
**Netzgerät 24V 100-300W IP67 dimmbar**  
Article nr.: 85481

## TECHNICAL DRAWING

