



220-240V AC, Phasenanschnitt LED


Netzgerät 24V 100-300W IP67 dimmbar

Article nr.: 85481

rutech dimmable LED power supply, constant voltage · for indoor and outdoor use, IP67 · CE, REACH, RoHS, SELV, active PFC · protection class I · protection against short circuit, overload, overtemperature and overvoltage · primary and secondary sided 1 input and output line approx. 300 mm · housing: aluminum · input voltage: 220-240V AC · Power: 100-300 watt · output current: 4.16-12.5 A · output voltage: 24 Volt · LxWxH in mm: 270 x 98 x 38.5 · temperature range: -30 to +50 °C · dimmable on primary side via TRIAC dimmer · dimming range: 3-100% (depending on the dimmer used)

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094854816
Housing colour	Aluminium
Length	270.00 mm
Width	98.00 mm
Height	38.50 mm
Lamp	Ohne
IP rating	67
Power	100-300 W
Psb	0,00 W






220-240V AC, Phasenanschnitt LED
Netzgerät 24V 100-300W IP67 dimmbar
Article nr.: 85481

TECHNICAL DATA

P _{no}	0,48 W
Current mA	4.166-12.500 mA
Input voltage	220-240
Output voltage	24
Material	Aluminium
Tolerance	5.00
Temperature range	-30 - 50
Suitable light source	LED

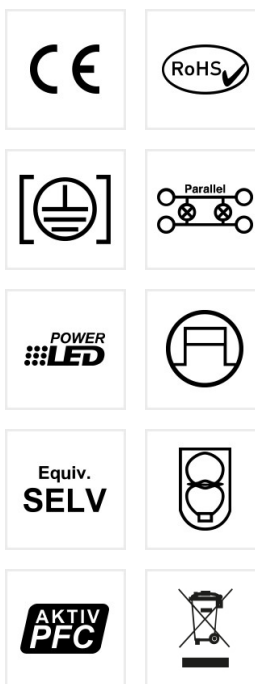



220-240V AC, Phasenanschnitt LED
Netzgerät 24V 100-300W IP67 dimmbar
Article nr.: 85481

TECHNICAL DRAWING

