




Einfarbig, Select, RGB, RGBW Master Funkempf.12-48V 240W/480W

Article nr.: 80450-V2

The RF receiver is able to control 1-4 coloured LEDs · The synchronization of the RF receiver takes place via 3-pole data bus, · which can be led up to 30 m from controller to controller · for indoor use · Material: plastic · IP20 · Protection class III, CE, RoHS, REACH · Input voltage: 12 V - 48 V DC · Power: 4 x 60 W at 12 V / 4 x 120 W at 24 V / 4 x 180 W at 36 V / 4 x 120 W at 48 V · output current: 4 x 5A at 12-36V / 4 x 2.5A at 48V · Carrier frequency: 868 MHz · Maximum cable cross-section at terminal: 1.5 sq mm · Synchronization via 3-pole data bus · with memory effect · up to 8 hand transmitter can be saved · Potential free contact for switching and dimming (only for single color)

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094805504
Housing colour	Blau
Length	166.00 mm
Width	53.40 mm
Height	23.00 mm
Lamp	without
IP rating	20
Power	240-480 W
Current mA	20000 mA

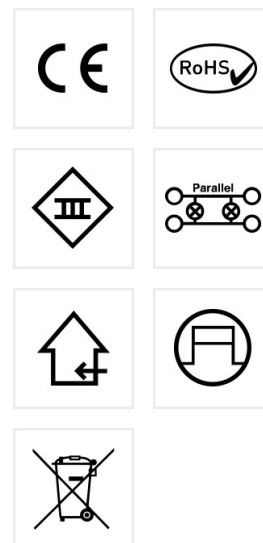



Einfarbig, Select, RGB, RGBW Master
Funkempf.12-48V 240W/480W
Article nr.: 80450-V2

TECHNICAL DATA

Input voltage	12-48
Output voltage	12-48
Material	Kunststoff
Temperature range	-20 - 50
Suitable light source	





Einfarbig, Select, RGB, RGBW Master
Funkempf. 12-48V 240W/480W
Article nr.: 80450-V2

TECHNICAL DRAWING

