rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke

TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

Aluminium gebürstet Kardan. EB-Strahler 2-Fach

Article nr.: 57502

For Indoor Use · Material: Massive Aluminum · Color: Aluminum Brushed and White · Round Drill Hole · Protection: IP20 (For Installation In A Ceiling) · 40° Adjustable and 360° Red ate · 57531-57532: Including Base GX 5.3 All Others Are · Without the Socket-for Example, Strain Relief Bracket (See Accessories) · Usable for Installation In Concrete Ceilings And Other Thermally · Difficult Mounting Locations. · Excluding: Light Bulb · · SECONDLIFE ITEM -heavily discounted- only while stocks last!

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094575025
Housing colour	Aluminium
Length	200.00 mm
Width	100.00 mm
Hole size	92 mm
Lamp	without
IP rating	20
Power	50 W
Lamp base	ohne

rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke

TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

Aluminium gebürstet Kardan. EB-Strahler 2-Fach

Article nr.: 57502

TECHNICAL DATA

Amount of LED	2
Material	Aluminium
Temperature range	to 70
Suitable light source	

rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke

TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

Aluminium gebürstet Kardan. EB-Strahler 2-Fach

Article nr.: 57502
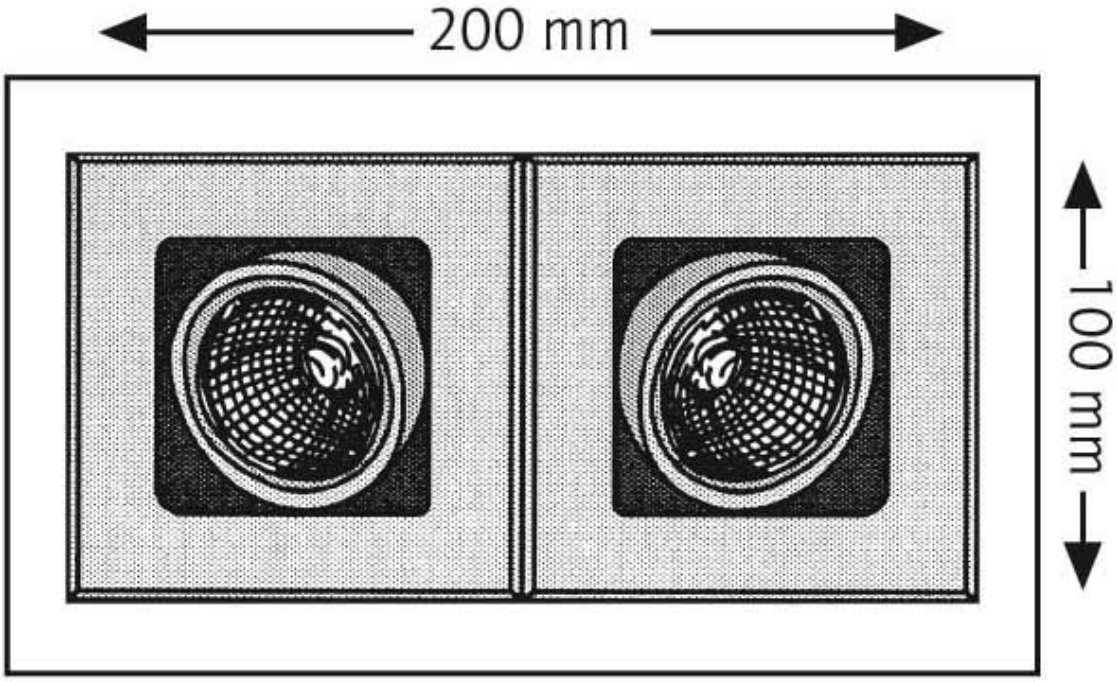
TECHNICAL DRAWING