




## 220V-240V 50/60Hz CRI80 LARA AC RUND Chrommatt 6W IP44

Article nr.: LED54209WW-V2

for indoor use, IP 44 · housing: die-cast aluminum, glass frosted · housing color: chrome matt · not swivelling · beam angle: 95° · power: 6 W · light colour: 3000 K · luminous flux: 519 lm · CRI: >80 · lifespan L70B50: >= 50.000 h · input: 230 V AC · protection class I, MM · installation depth: 28 mm · installation diameter: 55 mm · outer diameter: 82 mm · energy efficiency class: F · dimmable (please refer to the compatibility list on the homepage) · When used in alternating or cross connection, an LED compensator must be used in parallel with the switching wire

### TECHNICAL DATA

|                         |                    |
|-------------------------|--------------------|
| Unit Code               | pcs                |
| BAR code                | 4012094042091      |
| Housing colour          | Chrom matt         |
| Height                  | 24.00 mm           |
| Outer diameter          | 82 mm              |
| Hole size               | 55 mm              |
| Depth in ceiling        | 28.00 mm           |
| LED colour              | ca. 3000K warmweiß |
| Lightoutput per fixture | 519.00 lm          |
| Lamp                    | including LED      |

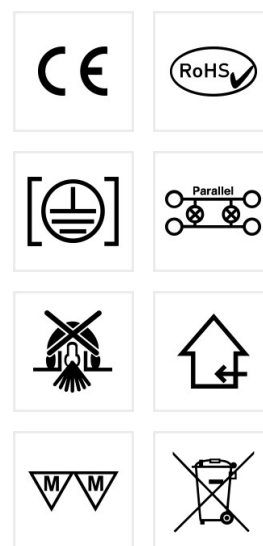




## 220V-240V 50/60Hz CRI80 LARA AC RUND Chrommatt 6W IP44

Article nr.: LED54209WW-V2

### TECHNICAL DATA

|                         |             |
|-------------------------|-------------|
| IP rating               | 44          |
| Furniture downlight     | 1           |
| Power                   | 6 W         |
| Psb                     | 0,00 W      |
| Current mA              | 26 mA       |
| Lamp base               | ohne        |
| Amount of LED           | 1           |
| Input voltage           | 220-240     |
| Material                | Aluminium   |
| Temperature range       | -20 - 50    |
| Energy efficiency class | EEK-Label_F |
| CRI                     | ≥ 80        |
| Lifetime L70B50         | 50.000 h    |
| Lifetime L90B10         | 20.000 h    |
| Suitable light source   |             |

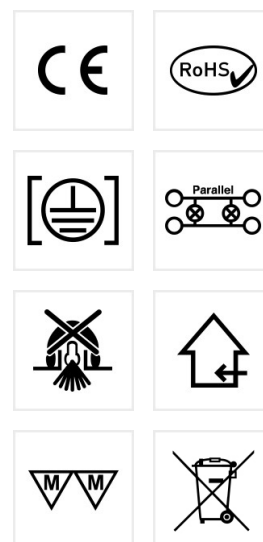



**220V-240V 50/60Hz CRI80 LARA AC**  
**RUND Chrommatt 6W IP44**  
Article nr.: LED54209WW-V2

#### TECHNICAL DRAWING

