
rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

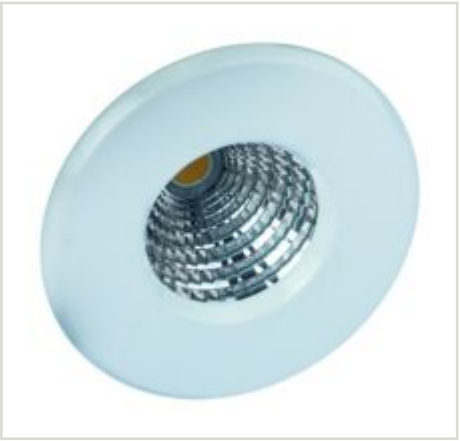

starr - weiß 350mA LED Einbaustr. 6, 5W IP 44 o.Konverter

Article nr.: R57881UWWOK


for indoor use, IP44 · · housing: steel; cover: diecast aluminum · housing color: white · not swivelling · beam angle: 24° · power: 6,5 W · light color: 2700 K · luminous flux: 463 lm · CRI: >80 · lifetime L70B50: >= 30.000 h · input: 350 mA DC · protection class III · · installation depth: 70 mm · ceiling cut-out: 72 mm · outer diameter: 85 mm · energy efficiency class: G · not included LED converter

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094578811
Housing colour	Weiss
Outer diameter	85 mm
Hole size	72 mm
Depth in ceiling	70.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	463.00 lm
Lamp	including LED
IP rating	44



rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

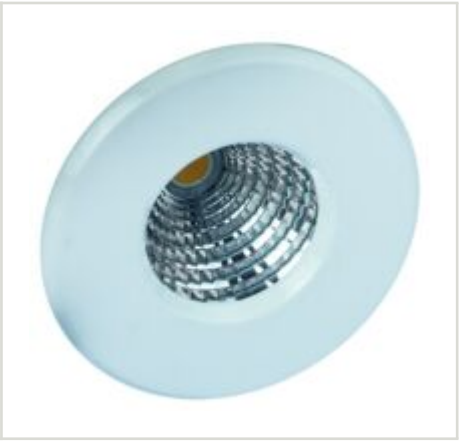

starr - weiß 350mA LED Einbaustr. 6, 5W IP 44 o.Konverter


Article nr.: R57881UWWOK

TECHNICAL DATA

Power	6,5 W
Current mA	350 mA
Lamp base	ohne
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 40
Energy ffficiency class	EEK-Label_G
CRI	≥ 80
Lifetime L70B50	30.000 h
Lifetime L90B10	20.000 h
Suitable light source	



rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE

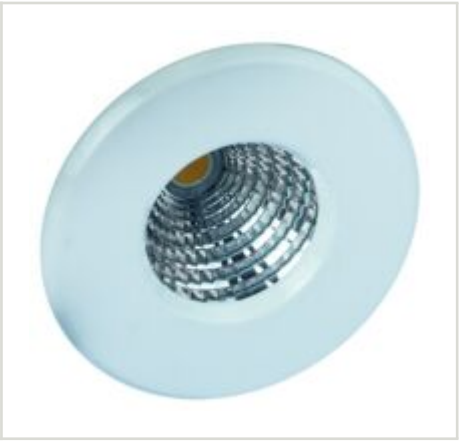

starr - weiß 350mA LED Einbaustr. 6, 5W IP 44 o.Konverter

Article nr.: R57881UWWOK

TECHNICAL DRAWING

