



**GAIL Einbaustrahler, dimmbar,
multicolour, plug&play schwenkb, rund,
6W, IP65, 27/30/4000K, CRI90-silber**
Article nr.: ALU57259SWD

for indoor and outdoor use, IP65 · with switchable light colour on the converter · housing: diecast aluminium, PC reflector, transparent plastic cover · housing colour: sand silver · swiveling · beam angle: 40° · power: 6 W · light colour: 2700/3000/4000 K · luminous flux: 600 lm · CRI: >90 · lifespan L70B50: >= 50,000 h · input voltage range: 200-240 V AC, 50/60 Hz · protection class II · installation depth: 55 mm · ceiling cut out: 68 mm · outer diameter: 82 mm · including constant current converter dimmable via TRIAC dimmer · with connector for plug-and-play-operation with 400 mm connection cable · tool-free replacement of the lamp · LxWxH constant current converter in mm: 99 x 38 x 28 · this product contains a light source of energy efficiency class F

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094572284
Housing colour	Silber
Height	45.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	55.00 mm
LED colour	2700/3000/4000 K umschaltbar
Lightoutput per fixture	600.00 lm
Lamp	including LED






**GAIL Einbaustrahler, dimmbar,
multicolour, plug&play schwenkb, rund,
6W, IP65, 27/30/4000K, CRI90-silber**
Article nr.: ALU57259SWD

TECHNICAL DATA

IP rating	65
Power	6 W
Psb	0,00 W
Voltage	200-240 V
Lamp base	ohne
Material	Aluminium
Temperature range	-20 - 50
CRI	≥ 90
Lifetime L70B50	50.000 h
Lifetime L90B10	46.000 h
Suitable light source	

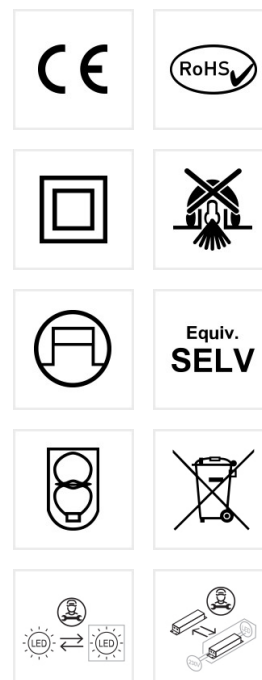



**GAIL Einbaustrahler, dimmbar,
multicolour, plug&play schwenkb, rund,
6W, IP65, 27/30/4000K, CRI90-silber**
Article nr.: ALU57259SWD

TECHNICAL DRAWING

