



2700K 38° 350mA CRI90 m.Scheibe
LED Einbaustr. 7W Eisengeb. o.Konverter
 Article nr.: R57365UWWOK

for indoor use, IP40 · Housing: diecast aluminum (protective glass, transparent) · Housing colour: iron brushed · swivel and rotatable · Beam angle: 38° · Power: 7 W · Light colour: 2700 K (100K) ultra warm white · Light flux: 650 lm · CRI: >80 · Lifespan L70: >= 33.000 h · Input current: 350 mA DC · protection class III · Installation depth: 50 mm · Ceiling cut-out: 80 mm · Outer diameter: 92 mm · Energie efficiency class: A+ · not including LED converter

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094573656
Housing colour	Eisen-gebürstet
Height	40.00 mm
Outer diameter	92 mm
Hole size	80 mm
Depth in ceiling	50.00 mm
LED colour	UWW ca. 2700 K
Lightoutput per fixture	650.00 lm
Lightoutput per LED	650.00 lm

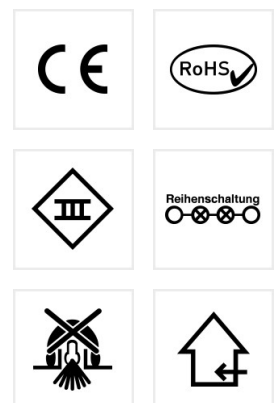


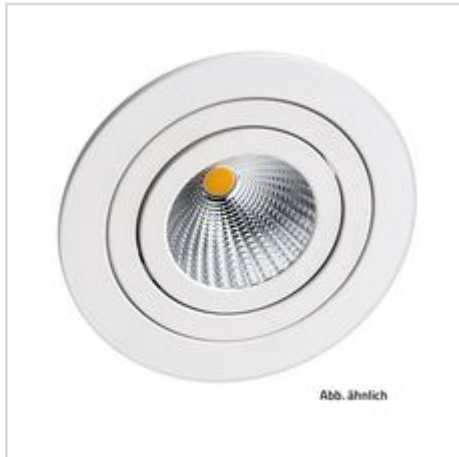

2700K 38° 350mA CRI90 m.Scheibe
LED Einbaustr. 7W Eisengeb. o.Konverter
Article nr.: R57365UWWOK

TECHNICAL DATA

Lamp	Inklusive LED
IP rating	40
Power	7 W
Current mA	350 mA
Lamp base	ohne
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 50
Energy efficiency class	A+
CRI	≥ 80

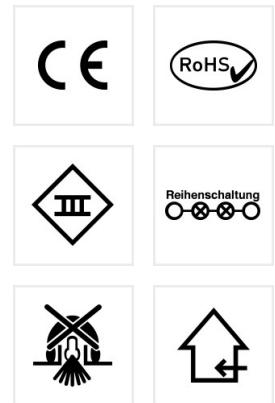



2700K 38° 350mA CRI90 m.Scheibe
LED Einbaustr. 7W Eisengeb. o.Konverter
Article nr.: R57365UWWOK

TECHNICAL DRAWING




image not found or type unknown