




**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
2700K**

Article nr.: ALU46355UWW-V2

for indoor use, IP40 · housing: diecast aluminium (plastic protection plate , diffuse) · housing colour: brushed iron · beam angle: 95° · power: 6 W · light colour: 2700 K · luminous flux: 500 lm · CRI: >80 · lifespan L70B50: >= 50.000 h · input voltage: 220-240 V AC · protection class I, MM · installation depth: 49 mm · ceiling cut-out: 68 mm · outer diameter: 82 mm · energy efficiency class: F · dimmable (please refer to the compatibility list on the homepage) · When used in alternating or cross connection, an LED compensator must be used in parallel with the switching wire

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094053554
Housing colour	Eisen-gebürstet
Height	39.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	49.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	500.00 lm
Lamp	including LED

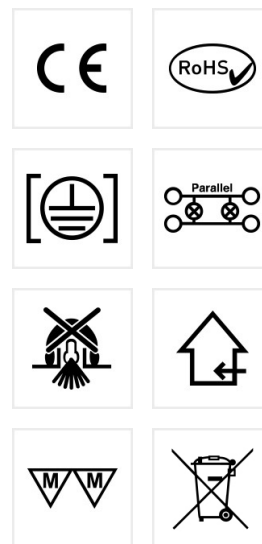




**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
2700K**

Article nr.: ALU46355UWW-V2

TECHNICAL DATA

IP rating	40
Power	6 W
Psb	0,00 W
Current mA	26 mA
Voltage	230 V
Lamp base	ohne
Material	Aluminium
Temperature range	-20 - 50
Energy efficiency class	EEK-Label_F
CRI	≥ 80
Lifetime L70B50	50.000 h
Lifetime L90B10	20.000 h
Suitable light source	





**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
2700K**

Article nr.: ALU46355UWW-V2

TECHNICAL DRAWING

