




**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
3000K**

Article nr.: ALU46355WW-V2

for indoor use, IP40 · housing: diecast aluminium (plastic protection plate , diffuse) · housing colour: brushed iron · beam angle: 95° · power: 6 W · light colour: 3000 K · luminous flux: 525 lm · CRI: >80 · lifespan L70B50: >= 50.000 h · input voltage: 220-240 V AC · protection class I, MM · installation depth: 49 mm · ceiling cut-out: 68 mm · outer diameter: 82 mm · energy efficiency class: F · dimmable (please refer to the compatibility list on the homepage) · When used in alternating or cross connection, an LED compensator must be used in parallel with the switching wire

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094063553
Housing colour	Eisen-gebürstet
Height	39.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	49.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	526.00 lm
Lamp	including LED

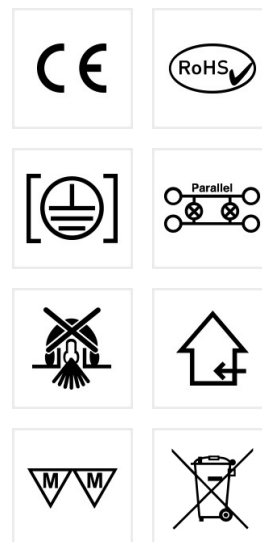




**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
3000K**

Article nr.: ALU46355WW-V2

TECHNICAL DATA

IP rating	40
Power	6 W
Psb	0,00 W
Current mA	26 mA
Voltage	230 V
Lamp base	ohne
Material	Aluminium
Temperature range	-20 - 50
Energy efficiency class	EEK-Label_F
CRI	≥ 80
Lifetime L70B50	50.000 h
Lifetime L90B10	20.000 h
Suitable light source	





**220V-240V 50/60Hz CRI80 Scheibe
matt SANYA AC RUND Eisen. 6WIP40
3000K**

Article nr.: ALU46355WW-V2

TECHNICAL DRAWING

