




## VARDAflex Osmium SVQ 2700K - 5M- Rolle LED-Strip, 24V, 13W/m, IP65, 2700K

Article nr.: 79637

flexible LED Stripe sealed in UV- and · saltwater resistant white silicone · for indoor- and outdoor use, IP65 · · cuttable every 50 mm / 7 LEDs · amount of LEDs per meter: 140 · LED pitch: 7.14 mm · beam angle: 110° · CRI: >90 · luminous flux per meter: 483 lm · power per meter: 13 W · lifetime L70B50: >= 54,000 h · LxWxH in mm: 5,000 x 16 x 16 · · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending diameter horizontal: 130 mm · Delivery contents: 5 meter reel with 1 meter connection cable on both ends, · 2x silicon end caps · this product contains a light source of energy efficiency class F

### TECHNICAL DATA

|                         |                          |
|-------------------------|--------------------------|
| Unit Code               | pcs                      |
| BAR code                | 4012094797373            |
| Housing colour          | Weiss                    |
| Length                  | 5000.00 mm               |
| Width                   | 16.00 mm                 |
| Height                  | 16.00 mm                 |
| LED colour              | ca. 2700K ultra warmweiß |
| Lightoutput per fixture | 2415.00 lm               |
| Lightoutput per LED     | 3.45 lm                  |
| Lamp                    | including LED            |






## VARDAflex Osmium SVQ 2700K - 5M- Rolle LED-Strip, 24V, 13W/m, IP65, 2700K

Article nr.: 79637

### TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| IP rating             | 65         |
| Power                 | 65 W       |
| Psb                   | 0,0 W      |
| Current mA            | 2708 mA    |
| Voltage               | 24 V       |
| Amount of LED         | 700        |
| Material              | Kunststoff |
| Temperature range     | -20 - 45   |
| LED per meter         | 140        |
| Dimension of segments | 50.00 mm   |
| CRI                   | ≥ 90       |
| Lifetime L70B50       | 54.000 h   |
| Lifetime L90B10       | 39.000 h   |
| Suitable light source |            |

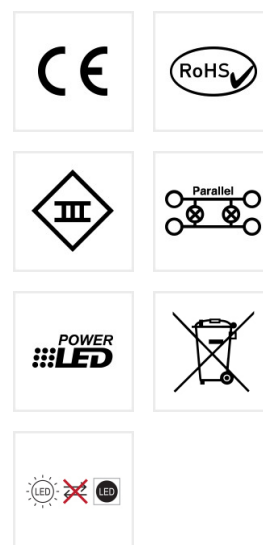



**VARDAflex Osmium SVQ 2700K - 5M-**  
**Rolle LED-Strip, 24V, 13W/m, IP65,**  
**2700K**  
Article nr.: 79637

## TECHNICAL DRAWING

