




VARDAflex Osmium SVQ RGBW-2700K - 5M-Rolle LED-Strip, 24V, 15, 6W/m, IP65, RGBUWW, 2700K

Article nr.: 79652

flexible LED Stripe sealed in UV- and · saltwater resistant white silicone · for indoor- and outdoor use, IP65 · · cuttable every 71.4 mm / 6 LEDs · amount of LEDs per meter: 84 · LED pitch: 11.9 mm · beam angle: 110° · CRI: >80 · luminous flux per meter: 311 lm · power per meter: 15.6 W · lifetime L70B50: >= 36,000 h · LxWxH in mm: 5,000 x 16 x 16 · · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending diameter horizontal: 130 mm · Delivery contents: 5 meter reel with 1 meter connection cable on both ends, · 2x silicon end caps · this product contains a light source of energy efficiency class F

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094797526
Housing colour	Weiss
Length	5000.00 mm
Width	16.00 mm
Height	16.00 mm
LED colour	RGBW 2700K
Lightoutput per fixture	1555.00 lm
Lightoutput per LED	3.70 lm
Lamp	including LED






**VARDaflex Osmium SVQ RGBW-2700K -
5M-Rolle LED-Strip, 24V, 15, 6W/m,
IP65, RGBUWW, 2700K**
Article nr.: 79652

TECHNICAL DATA

IP rating	65
Power	78 W
Psb	0,0 W
Current mA	3250 mA
Voltage	24 V
Amount of LED	420
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	84
Dimension of segments	71.40 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Lifetime L90B10	33.000 h
Suitable light source	

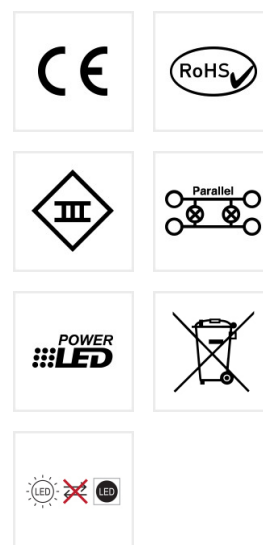



**VARDaflex Osmium SVQ RGBW-2700K -
5M-Rolle LED-Strip, 24V, 15, 6W/m,
IP65, RGBUWW, 2700K**
Article nr.: 79652

TECHNICAL DRAWING

