




VARDAflex Sauna SVQ -RGB S?-?? Flex. LED-Strip, 24V, 6W/m, IP68, RGB SVQ

Article nr.: S76025

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · specially for the sauna area · cuttable every 125 mm / 21 LEDs · amount of LEDs per meter: 168 · LED pitch: 5.95 mm · beam angle: 120° · CRI: - · luminous flux per meter: 240 lm · voltage: 24V DC · power per meter: 6 W · lifespan L70B50: >= 36,000 h · WxH in mm: 16 x 17 · Temperature range: -40 to +90°C · Processing temperature: +10 to +90°C · maximum operating length with connection on one and both sides: 10 meters · min. bending diameter horizontal: 300 mm · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at 115 mm from the connector on the cable. · the anti-wicking ferrule is not included in the rutech Lightdesign version. · Attention. This item can only be ordered with injection moulded feeder/end cap.

TECHNICAL DATA

Unit Code	metre
BAR code	4012094760254
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	RGB
Lightoutput per LED	4.29 lm
Lamp	including LED
IP rating	68
Psb	0,00 W

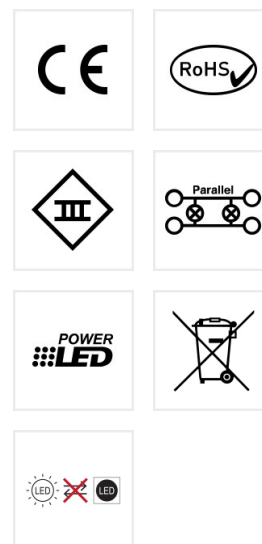




VARDAflex Sauna SVQ -RGB S?-?? Flex.
LED-Strip, 24V, 6W/m, IP68, RGB SVQ
Article nr.: S76025

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-40 - 90
LED per meter	168
Dimension of segments	125.00 mm
Lifetime L70B50	36.000 h
Lifetime L90B10	23.000 h
Suitable light source	

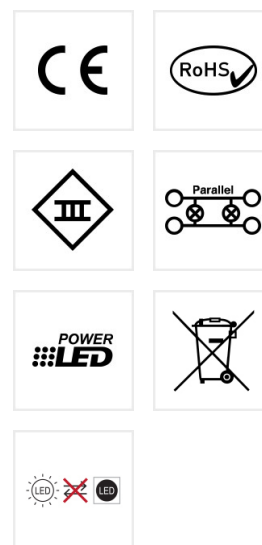




VARDaflex Sauna SVQ -RGB S? Flex. LED-Strip, 24V, 6W/m, IP68, RGB SVQ

Article nr.: S76025

TECHNICAL DRAWING

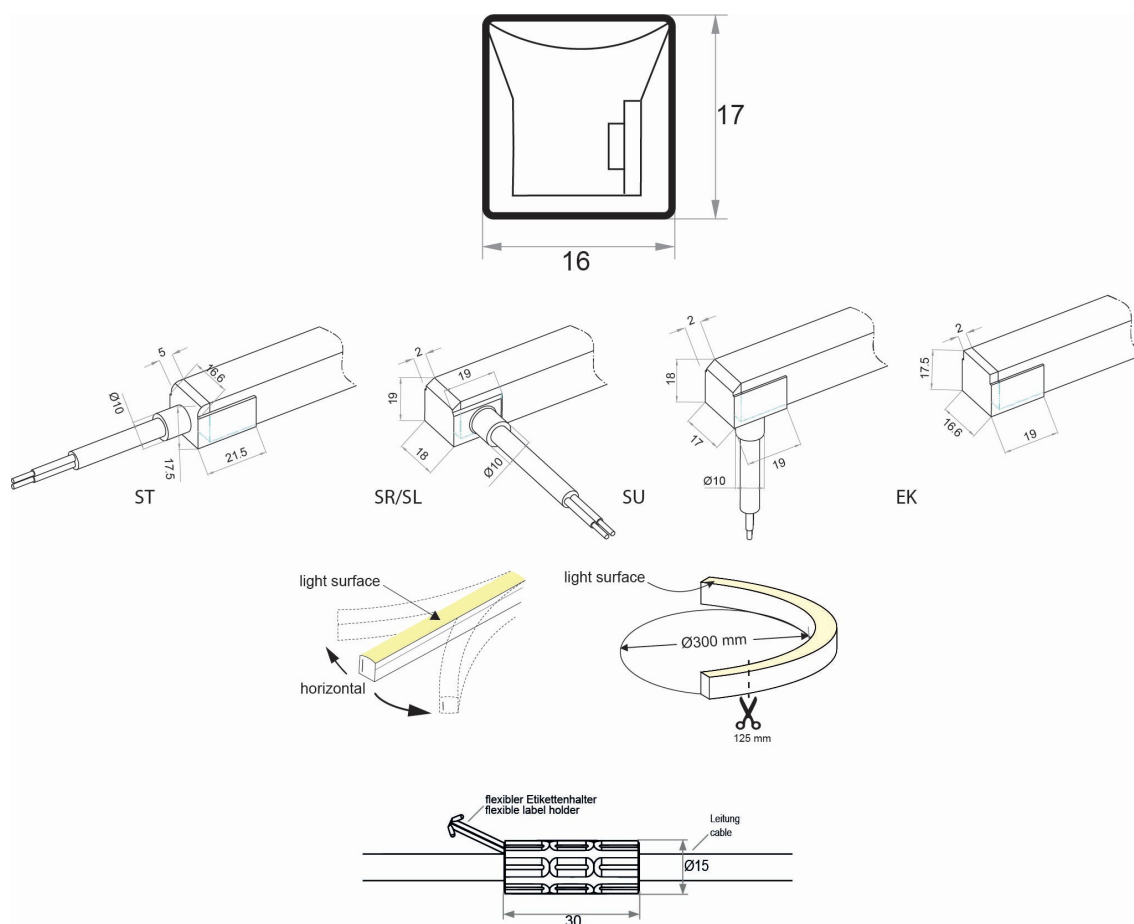

Wasserstop*

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule*

The anti-wicking ferrule is located at 115 mm from the connector on the cable.

*Der Wasserstop ist nicht enthalten bei Bestellungen über rutec Lightdesign.
*The anti-wicking ferrule is not included in orders placed via rutec Lightdesign.