rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE




LED-Strip VARDAflex High, IP20 12V, 28, 8W/m, 830, 3m

Article nr.: 88195

Vardaflex High Eco · · Flexible LED strip with self-adhesive back, · for indoor use · · 28.8W, 120 LED, 2340 lm (3000K) pre metre · Cuttable every 2,5 cm or 3 LEDs · ATTENTION: This strip can only be soldered every 50 cm · on surface side or every 2,5 cm on back side. For soldering · on backside the seld-adhesive glue must be removed · and there must be an isolation to the profile or ground. · Neutral white, warm white and ultra warm white · Spacing: 16mm · Maximum lengt per connection: 3 metres · Feed in anew for longer lengths. · Scope of delivery: 3 metre roll · Graded and stored by binning codes · Note: Do not operate stip without additional heat sink · and adequate ventilation. · · SECONDLIFE ITEM -heavily discounted- only while stocks last!

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094881959
Length	3000.00 mm
Width	10.00 mm
Height	1.50 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	8352.00 lm
Lightoutput per LED	23.20 lm
Lamp	including LED
IP rating	20

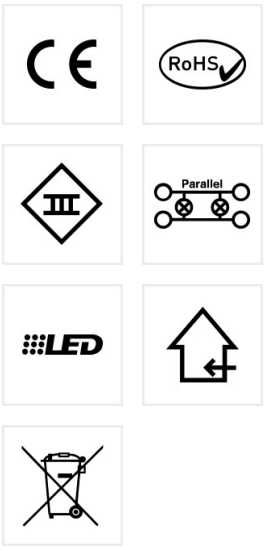

rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE



LED-Strip VARDAflex High, IP20 12V, 28, 8W/m, 830, 3m

Article nr.: 88195

TECHNICAL DATA

Power	86,4 W
Psb	0,00 W
Current mA	7200 mA
Voltage	12 V
Amount of LED	360
Temperature range	-20 - 40
LED per meter	120
Dimension of segments	25.00 mm
CRI	≥ 80
Suitable light source	