



VARDAflex Sauna TVQ - 2700K S?-??


**Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ**

Article nr.: S76093

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · specially for the sauna area · cuttable every 55.56 mm / 6 LEDs · amount of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 280 lm · voltage: 24V DC · power per meter: 6 W · lifespan L70B50: >= 36.000 h · WxH in mm: 16 x 17 · Temperature range: -45 to +90°C · Processing temperature: +10 to +90°C · Maximum length per connection: 10 meter · min. bending diameter vertical: 300 mm · anti-wicking ferrule diameter = 15 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable. · the anti-wicking ferrule is not included in the rutec Lightdesign version.

TECHNICAL DATA

Unit Code	metre
BAR code	4012094760933
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	2700K
Lightoutput per LED	2.59 lm
Lamp	Inklusive LED
IP rating	68
Psb	0,00 W

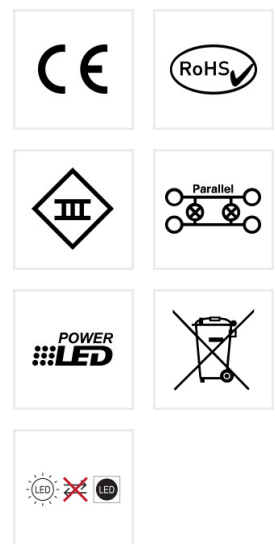




VARDAflex Sauna TVQ - 2700K S?-??

Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ

Article nr.: S76093

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-45 - 90
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 80
Lifetime L70B50	36.000 h

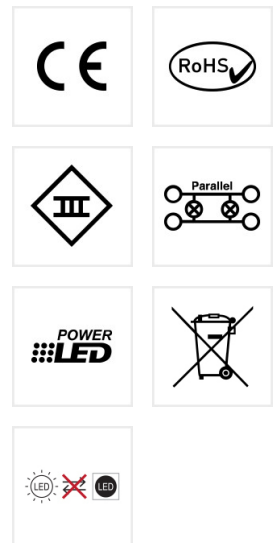




VARDAflex Sauna TVQ - 2700K S?-??

Flex. LED-Strip, 24V, 6W/m, IP68,
2700K TVQ

Article nr.: S76093

TECHNICAL DRAWING

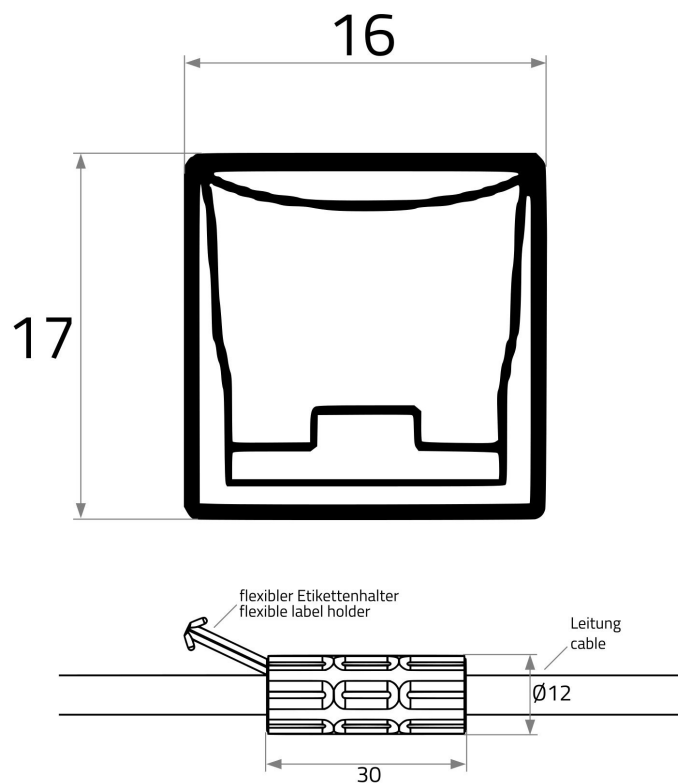

Wasserstop

Der Wasserstop befindet sich ca. 115 mm entfernt von der Einspeisung des LED Strips auf der Zuleitung.

Anti-wicking ferrule

The anti-wicking ferrule is located at 115 mm from the connector on the cable.