rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE




VARDAflex 4inONE-84 - 5M-Ro. Flex. LED Leiste, Innen, RGBBZ 2400K

Article nr.: 79561

flexible LED Strip with self adhesive backside, · for indoor use. · · Can be seperated every 7.1 cm or 6 LEDs · Number of LEDs: 420 · LED pitch: 11.91 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 1186 lm · luminous flux 2400K per meter: 590 lm · Voltage: 24V DC · Power per meter: 27 W · Lifetime L70B50: >= 36.000 h · energy efficiency class: G · LxWxH in mm: 5.000 x 12 x 2 · · Caution: Do not operate strip without aluminium profile · and adequate ventilation. · Easy installation with solderless connector (optional). · Maximum length per connection: 5 meter. New connectors for greater length. · Delivery contents: 5 meter roll · · SECONDLIFE ITEM -heavily discounted- only while stocks last!

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094795614
Housing colour	Weiss
Length	5000.00 mm
Width	12.00 mm
Height	2.00 mm
LED colour	RGBW 2400K
Lightoutput per fixture	5930.00 lm
Lightoutput per LED	14.12 lm
Lamp	including LED

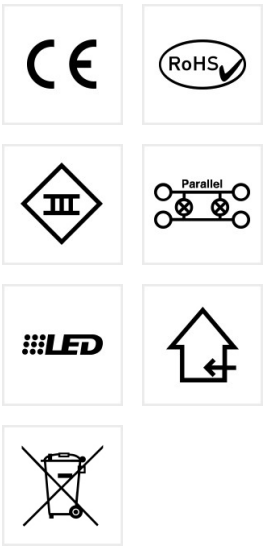

rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE




VARDAflex 4inONE-84 - 5M-Ro. Flex. LED Leiste, Innen, RGBBZ 2400K

Article nr.: 79561

TECHNICAL DATA

IP rating	20
Power	135 W
Current mA	5625 mA
Amount of LED	420
Input voltage	24
Temperature range	-20 - 45
LED per meter	84
Dimension of segments	71.00 mm
Energy ffficiency class	EEK-Label_G
CRI	≥ 80
Lifetime L70B50	36.000 h
Lifetime L90B10	33.000 h
Suitable light source	

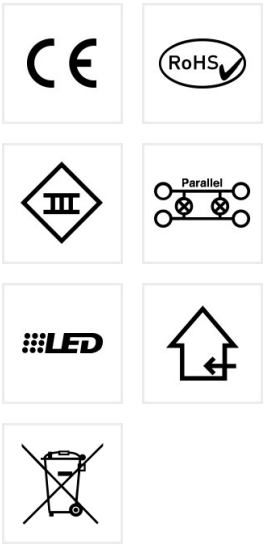

rutec Licht GmbH & Co. KG | Carl-Zeiss-Str. 15 | 28857 Syke
TEL +49 (0) 42 42 95 65 - 0 | FAX +49 (0) 42 42 95 65 - 25 | E-MAIL INFO@RUTEC.DE | WWW.RUTEC.DE



VARDAflex 4inONE-84 - 5M-Ro. Flex. LED Leiste, Innen, RGBBZ 2400K

Article nr.: 79561

TECHNICAL DRAWING

