



Vardaflex Wallpaper Select LD


Flex.LEDSheet, 24V 6300-2500K CRI95

Article nr.: 36219

with self-adhesive backside, · for indoor use, IP20 · · can be separated every 20 x 20 mm or 2 LEDs ·
 number of LEDs: 576 · LED pitch: 20 mm · min. bending diameter: 30 mm · beam angle: 120° · CRI:
 >95 · luminous flux: 12000 lm · voltage: 24V DC · power: 120 W · power per LED: 0.20 W · lifespan
 L70B50: >= 36.000 h · LxWxH in mm: 480 x 240 x 6.5 · · Maximum amount per connection: 1 x
 VARDaflex Wallpaper · Delivery contents: 1x flexible circuit board, 2x connector, · 2x flexible connector

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094362199
Length	480.00 mm
Width	240.00 mm
Height	6.50 mm
LED colour	2700-6500K tunable white
Lightoutput per fixture	12000.00 lm
Lightoutput per LED	20.83 lm
Lamp	including LED
IP rating	20

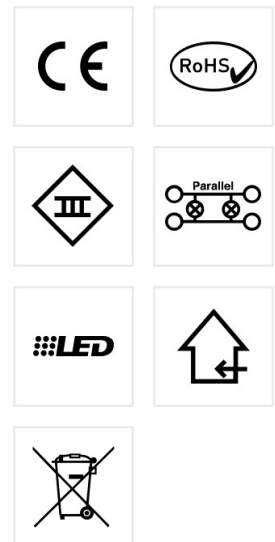




Vardaflex Wallpaper Select LD

Flex.LEDSheet, 24V 6300-2500K CRI95

Article nr.: 36219

TECHNICAL DATA

Power	120 W
Current mA	5000 mA
Voltage	24 V
Amount of LED	576
Temperature range	-20 - 45
Dimension of segments	20.00 mm
CRI	≥ 95
Lifetime L70B50	36.000 h
Suitable light source	

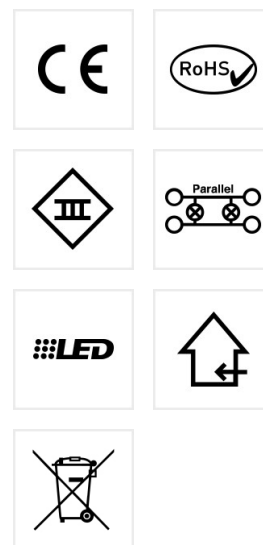



Vardaflex Wallpaper Select LD
Flex.LEDSheet, 24V 6300-2500K CRI95
Article nr.: 36219

TECHNICAL DRAWING

