
rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

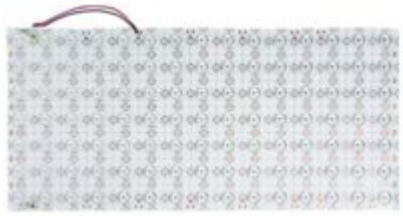

VARDAflex Wallpaper Backlite LD Flex.LEDSheet, 24V, Innen, 3000K CRI80

Article nr.: 36505

for indoor use, IP20 · · can be seperated every 3.33 cm or 1 LED · number of LEDs: 105 · LED pitch: 33.3 mm · min. bending diameter: 50 mm · beam angle: 160° · CRI: >80 · luminous flux: 3993 lm · voltage: 24V DC · power: 32 W · power per LED: 0.3 W · lifetime L70: >= 50.000 h · LxWxH in mm: 500 x 235 x 6.5 · · Maximum amount per connection: 6 x VARDAflex Wallpaper Backlite · Delivery contents: 1x flexible circuit board, 2x connector

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094365053
Length	500.00 mm
Width	235.00 mm
Height	6.50 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	3993.00 lm
Lightoutput per LED	38.03 lm
Lamp	including LED
IP rating	20

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



VARDAflex Wallpaper Backlite LD Flex.LEDSheet, 24V, Innen, 3000K CRI80

Article nr.: 36505

TECHNICAL DATA

Power	32 W
Current mA	1333 mA
Voltage	24 V
Amount of LED	105
Material	Kunststoff
Temperature range	-20 - 45
Dimension of segments	33.30 mm
CRI	≥ 80
Lifetime L70B50	50.000 h
Suitable light source	

