




VARDAflex AC Work Light 3000K - 25M- Trommel Vergossener LED-Strip, 230V, 8W/m, IP65, 3000K

Article nr.: 79915

Construction site lighting in LED strip design · for outdoor use, IP65 · UV-resistant · number of LEDs: 1850 · LED pitch: 13.51 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 795 lm · voltage: 230 V AC · power per meter: 8 W · energy efficiency class: E · lifetime L70B50: >= 50,000 h · LxWxH in mm: 25.000 x 11.3 x 8 · Attention: Only operate the LED strip when completely unrolled · Maximum length per connection: 25 meter · Scope of delivery: 25 metre roll wound onto a drum with 1.6 m connection cable and contour plug · Suitable for use on construction sites in accordance with DGUV-I 203-005,K2 + DGUV-I 203-006

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094799155
Housing colour	Weiss
Length	25000.00 mm
Width	11.30 mm
Height	8.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	19875.00 lm
Lightoutput per LED	10.74 lm
Lamp	including LED

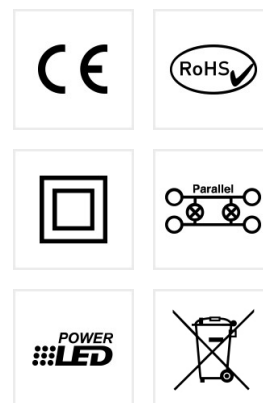



VARDAflex AC Work Light 3000K - 25M- Trommel Vergossener LED-Strip, 230V, 8W/m, IP65, 3000K

Article nr.: 79915

TECHNICAL DATA

IP rating	65
Power	200 W
Psb	0,0 W
Voltage	230 V
Amount of LED	1850
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	74
Energy efficiency class	EEK-Label_E
CRI	≥ 80
Lifetime L70B50	50.000 h
Lifetime L90B10	28.000 h
Suitable light source	





VARDAflex AC Work Light 3000K - 25M-
Trommel Vergossener LED-Strip, 230V,
8W/m, IP65, 3000K
Article nr.: 79915

TECHNICAL DRAWING

