




**VARDAflex Eco CRI90 - 5 M-Rolle
Flex.LEDStrip, 24V, Innen, 3000K**
Article nr.: 82415

flexible LED Strip with self adhesive backside, · for indoor use. · Can be separated every 100 mm or 7 LEDs · Number of LEDs: 350 · LED pitch: 14.28 mm · beam angle: 120° · CRI: >90 · Lumen per meter: 410 lm · Voltage: 24V DC · Power per meter: 4.8 W · Lifetime L70B50: >= 36.000 h · energy efficiency class: G · LxWxH in mm: 5.000 x 8 x 2 · Easy installation with solderless connector (optional). · Maximum length per connection: 10 meter. New connectors for greater length. · Delivery contents: 5 meter reel

TECHNICAL DATA

| | |
|-------------------------|--------------------|
| Unit Code | pcs |
| BAR code | 4012094824154 |
| Housing colour | Weiss |
| Length | 5000.00 mm |
| Width | 8.00 mm |
| Height | 2.00 mm |
| LED colour | ca. 3000K warmweiß |
| Lightoutput per fixture | 2050.00 lm |
| Lightoutput per LED | 5.85 lm |
| Lamp | including LED |



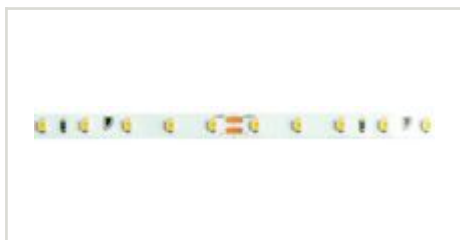

VARDAflex Eco CRI90 - 5 M-Rolle
Flex.LEDStrip, 24V, Innen, 3000K
 Article nr.: 82415

TECHNICAL DATA

| | |
|-------------------------|-------------|
| IP rating | 20 |
| Power | 24 W |
| Psb | 0,00 W |
| Current mA | 1000 mA |
| Voltage | 24 V |
| Amount of LED | 350 |
| Temperature range | -20 - 45 |
| LED per meter | 70 |
| Dimension of segments | 100.00 mm |
| Energy efficiency class | EEK-Label_G |
| CRI | ≥ 90 |
| Lifetime L70B50 | 36.000 h |
| Lifetime L90B10 | 13.000 h |
| Suitable light source | |





VARDAflex Eco CRI90 - 5 M-Rolle
Flex.LEDStrip, 24V, Innen, 3000K
Article nr.: 82415

TECHNICAL DRAWING

