



**VARDAflex Eco Plus CRI90 - 5 M-Rolle
Flex.LEDStrip, 24V, 9, 6W/m, IP20,
6500K**

Article nr.: 82474

flexible LED Strip with self adhesive backside, · for indoor use. · · can be seperated every 50 mm or 7 LEDs · number of LEDs: 700 · LED pitch: 7.14 mm · beam angle: 120° · CRI: >90 · luminous flux per meter: 977 lm · voltage: 24 V DC · power per meter: 9.6 W · lifespan L70B50: >= 50,000 h · energy efficiency class: E · LxWxH in mm: 5.000 x 8 x 1.4 · · Easy installation with solderless connector (optional). · Maximum length per connection: 5 meter. New connectors for greater length. · Delivery contents: 5 metre roll with 300 mm connection cable

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094824741
Housing colour	Weiss
Length	5000.00 mm
Width	8.00 mm
Height	1.40 mm
LED colour	ca. 6500K kaltweiß
Lightoutput per fixture	4885.00 lm
Lightoutput per LED	6.98 lm
Lamp	including LED






VARDAflex Eco Plus CRI90 - 5 M-Rolle Flex.LEDStrip, 24V, 9, 6W/m, IP20, 6500K

Article nr.: 82474

TECHNICAL DATA

IP rating	20
Power	48 W
Psb	0,00 W
Current mA	2000 mA
Voltage	24 V
Amount of LED	700
Temperature range	-20 - 45
LED per meter	140
Dimension of segments	50.00 mm
Energy efficiency class	EEK-Label_E
CRI	≥ 90
Lifetime L70B50	50.000 h
Lifetime L90B10	30.000 h
Suitable light source	

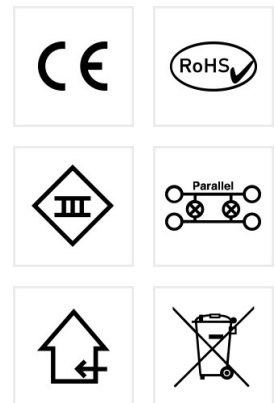



VARDAflex Eco Plus CRI90 - 5 M-Rolle
Flex.LEDStrip, 24V, 9, 6W/m, IP20,
6500K
Article nr.: 82474

TECHNICAL DRAWING

