rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



LD JUPITER S 7W 2700K 36° white/white D61 DALI

Article nr.: ALU509311UWW-DA-36

Downlight with narrow bezel, offset light source, rotates 355° and tilts 35° · colour bezel: white · colour reflector: white · power: 7 W · color temperature: 2700 K · luminous flux: 535 lm · beam angle: 36° · CRI: >90 · L70B50 lifespan: >= 105.000 h · input voltage: 220-240 V AC 50/60 Hz, 180-264 V DC · includes DALI-2 and push-dim constant-current converter · protection class II, IP20 · outer diameter: 61 mm · installation diameter: 55 mm · height: 76 mm · This product contains a light source of energy efficiency class E

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835791236
Housing colour	Weiss
Height	76.00 mm
Outer diameter	61 mm
Hole size	55 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	535.00 lm
Lamp	including LED
IP rating	20

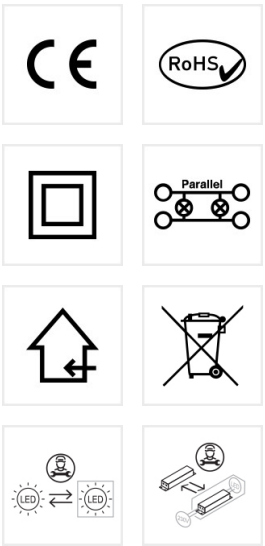

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



LD JUPITER S 7W 2700K 36° white/white D61 DALI

Article nr.: ALU509311UWW-DA-36

TECHNICAL DATA

Power	7 W
Psb	<0,5 W
Pno	<0,5 W
Pnet	<0,5 W
Current mA	200 mA
Voltage	220-240 V
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 45
CRI	≥ 90
Lifetime L70B50	105.000 h
Suitable light source	

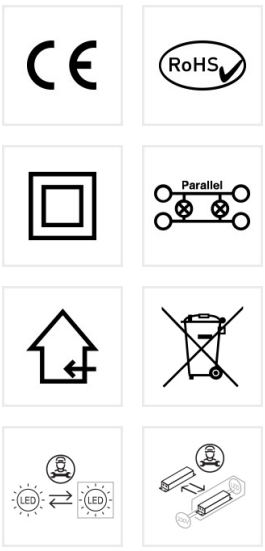

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



LD JUPITER S 7W 2700K 36° white/white D61 DALI

Article nr.: ALU509311UWW-DA-36

TECHNICAL DRAWING

