**rutec LIGHTDESIGN GmbH** | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




# LD JUPITER S 7W 2700K 36° black/black D61 DALI

Article nr.: ALU509322UWW-DA-36

Downlight with narrow bezel, offset light source, rotates 355° and tilts 35° · colour bezel: black · colour reflector: black · power: 7 W · color temperature: 2700 K · luminous flux: 535 lm · beam angle: 36° · CRI: >90 · L70B50 lifespan: >= 105.000 h · input voltage: 220-240 V AC 50/60 Hz, 180-264 V DC · includes DALI-2 and push-dim constant-current converter · protection class II, IP20 · outer diameter: 61 mm · installation diameter: 55 mm · height: 76 mm · This product contains a light source of energy efficiency class E

## TECHNICAL DATA

| | |
|---|---|
| Unit Code | pcs |
| BAR code | 4251835792233 |
| Housing colour | Schwarz |
| Height | 76.00 mm |
| Outer diameter | 61 mm |
| Hole size | 55 mm |
| LED colour | ca. 2700K ultra warmweiß |
| Lightoutput per fixture | 535.00 lm |
| Lamp | including LED |
| IP rating | 20 |

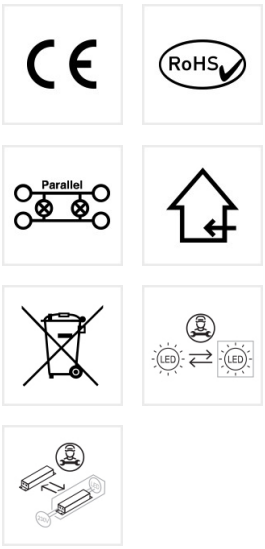

**rutec LIGHTDESIGN GmbH** | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




# LD JUPITER S 7W 2700K 36° black/black D61 DALI

Article nr.: ALU509322UWW-DA-36

## TECHNICAL DATA

| | |
|---|---|
| Power | 7 W |
| Psb | <0,5 W |
| Pno | <0,5 W |
| Pnet | <0,5 W |
| Current mA | 200 mA |
| Voltage | 220-240 V |
| Amount of LED | 1 |
| Material | Aluminium |
| Temperature range | -20 - 45 |
| CRI | ≥ 90 |
| Lifetime L70B50 | 105.000 h |
| Suitable light source | |

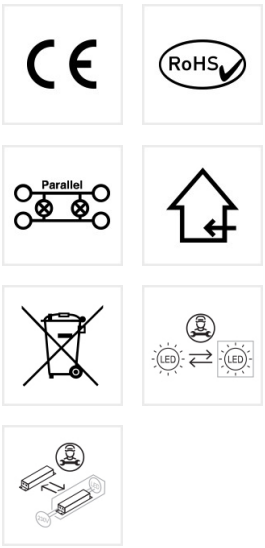

**rutec LIGHTDESIGN GmbH** | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



# LD JUPITER S 7W 2700K 36° black/black D61 DALI

Article nr.: ALU509322UWW-DA-36

## TECHNICAL DRAWING

