




**Quadro 2700K 25° 350mA CRI80 LED
Einbaustr. 8W eisengeb.m.Konv.**

Article nr.: ALU53475UWW

for indoor use, IP 20 · · housing: diecast aluminum, glass reflector · housing color: iron brushed · 30° swivelling · beam angle: 25° · power: 8 W · light color: 2700 K · luminous flux: 900 lm · CRI: >80 · lifespan L70B50: >= 50,000 h · input: 350 mA DC · protection class III, MM · · installation depth: 35 mm · ceiling cut-out: 68 mm · outer dimensions: 82 x 82 mm · including LED converter · this product contains a light source of energy efficiency class E · SECONDLIFE ITEM -heavily discounted- only while stocks last!

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094434759
Housing colour	Eisen-gebürstet
Length	82.00 mm
Width	82.00 mm
Height	25.00 mm
Hole size	68 mm
Depth in ceiling	35.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	900.00 lm

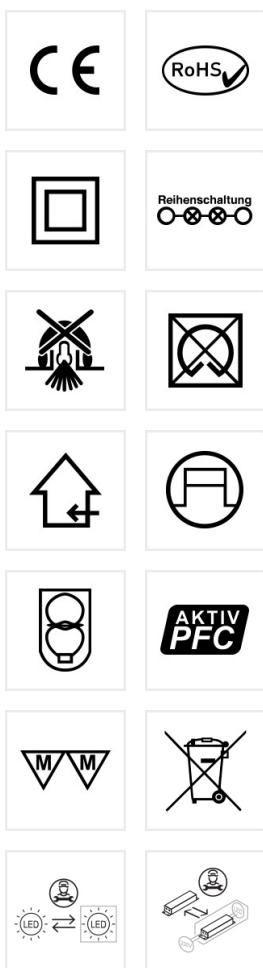



Quadro 2700K 25° 350mA CRI80 LED
Einbaustr. 8W eisengeb.m.Konv.
 Article nr.: ALU53475UWW

TECHNICAL DATA

Lamp	including LED
IP rating	20
Power	8 W
Voltage	230 V
Lamp base	ohne
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 40
CRI	≥ 80
Lifetime L70B50	50.000 h
Suitable light source	





Quadro 2700K 25° 350mA CRI80 LED
Einbaustr. 8W eisengeb.m.Konv.
Article nr.: ALU53475UWW

TECHNICAL DRAWING

