




**2700K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb. o.Konv.**
Article nr.: ALU57685UWWOK

for indoor use, IP20 · · housing: diecast aluminum, glass reflector, protection glass · cardanic mounting-steel · housing color: iron brushed · 40° swivel and 360° rotating · beam angle: 25° · power: 8 W · light color: 2700K (100K) · luminous flux: 694 lm · CRI: >90 · lifespan L70: >= 33.000 h · input: 350mA DC · protection class III · · installation depth: 55 mm · ceiling cut out: 92 mm · outer diameter: 110 mm · energy efficiency class: A+ · not included LED converter

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094076850
Housing colour	Eisen-gebürstet
Height	55.00 mm
Outer diameter	110 mm
Hole size	92 mm
Depth in ceiling	55.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	694.00 lm
Lamp	including LED




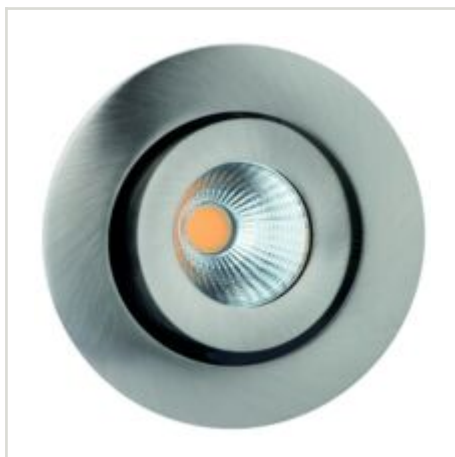


2700K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb. o.Konv.
Article nr.: ALU57685UWWOK

TECHNICAL DATA

IP rating	20
Power	8 W
Current mA	350 mA
Lamp base	ohne
Amount of LED	1
Material	Aluminium
Temperature range	-20 - 40
CRI	≥ 90
Suitable light source	



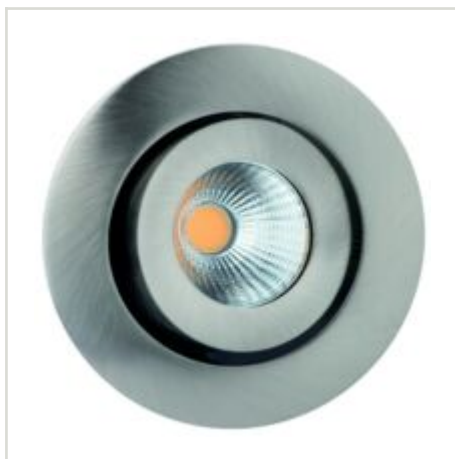

2700K 25° 350mA CRI90 m.Scheibe LED
Einbaustr. 8W eisengeb. o.Konv.
Article nr.: ALU57685UWWOK

TECHNICAL DRAWING

