rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

TULKA starr 1, 4401 X5CrNiMo 316 schwarz LD LED Einbaustr. 8W IP55 o.Konverter

Article nr.: R57692WWOK25

for indoor- and outdoor use, IP55 · · housing: V4A stainless steel, glass reflector, protective glass · housing color: white · not swivelling · beam angle: 25° · power: 8 W · light color: 3000 K · luminous flux: 754 lm · CRI: >80 · lifetime L70B50: >= 54.000 h · input: 350 mA DC · protection class III · · installation depth: 55 mm · ceiling cut-out: 68 mm · outer diameter: 82 mm · energie efficiency class: F · not included LED converter

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094756929
Housing colour	Schwarz
Height	44.00 mm
Outer diameter	82 mm
Hole size	68 mm
Depth in ceiling	55.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per fixture	754.00 lm
Lamp	including LED

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

TULKA starr 1, 4401 X5CrNiMo 316 schwarz LD LED Einbaustr. 8W IP55 o.Konverter

Article nr.: R57692WWOK25

TECHNICAL DATA

IP rating	55
Power	8 W
Current mA	350 mA
Material	Edelstahl
Temperature range	-20 - 40
Energy ffficiency class	EEK-Label_F
CRI	≥ 80
Lifetime L70B50	54.000 h
Suitable light source	

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

TULKA starr 1, 4401 X5CrNiMo 316 schwarz LD LED Einbaustr. 8W IP55 o.Konverter

Article nr.: R57692WWOK25
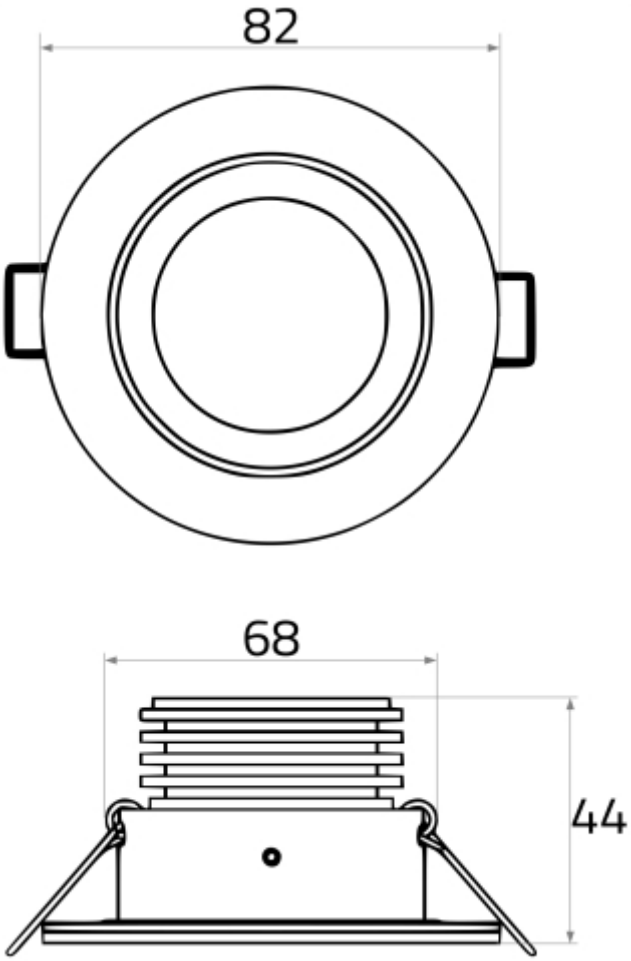
TECHNICAL DRAWING