




## VARDAflex Osmium FEMTO SVQ 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S71613

flexible LED Stripe sealed in UV- and · saltwater resistant white silicone · for indoor- and outdoor use, IP65 · · cuttable every 50 mm / 7 LEDs · amount of LEDs per meter: 140 · LED pitch: 7.14 mm · beam angle: 110° · CRI: >90 · luminous flux per meter: 560 lm · power per meter: 13 W · lifetime L70B50: >= 50,000 h · WxH in mm: 11 x 11 · · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending radius horizontal: 55 mm

### TECHNICAL DATA

|                     |                          |
|---------------------|--------------------------|
| Unit Code           | metre                    |
| BAR code            | 4012094716138            |
| Housing colour      | Weiss                    |
| Width               | 11.00 mm                 |
| Height              | 11.00 mm                 |
| LED colour          | ca. 2700K ultra warmweiß |
| Lightoutput per LED | 4.00 lm                  |
| Lamp                | including LED            |
| IP rating           | 65                       |
| Psb                 | 0,00 W                   |

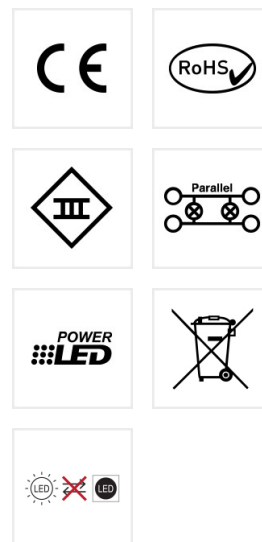




## VARDAflex Osmium FEMTO SVQ 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S71613

### TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| Voltage               | 24 V       |
| Material              | Kunststoff |
| Temperature range     | -20 - 45   |
| LED per meter         | 140        |
| Dimension of segments | 50.00 mm   |
| CRI                   | ≥ 90       |
| Lifetime L70B50       | 50.000 h   |
| Suitable light source |            |

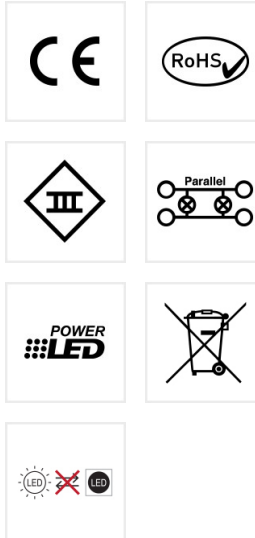



**VARDAflex Osmium FEMTO SVQ 2700K**  
**LD S?-?? Flex.LEDStrip, 24V, UWW**  
Article nr.: S71613

## TECHNICAL DRAWING

