




VARDAflex Osmium SVQ 3000K LD S?- ?? Flex.LEDStrip, 24V, WW

Article nr.: S71635

flexible LED Stripe sealed in UV- and · saltwater resistant white silicone · for indoor- and outdoor use, IP65 · · cuttable every 50 mm / 7 LEDs · amount of LEDs per meter: 140 · LED pitch: 7.14 mm · beam angle: 110° · CRI: >90 · luminous flux per meter: 498 lm · power per meter: 13 W · lifetime L70B50: >= 54,000 h · LxWxH in mm: 5,000 x 16 x 16 · · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending radius horizontal: 65 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094716350
Housing colour	Weiss
Width	16.00 mm
Height	16.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per LED	3.55 lm
Lamp	including LED
IP rating	65
Psb	0,00 W

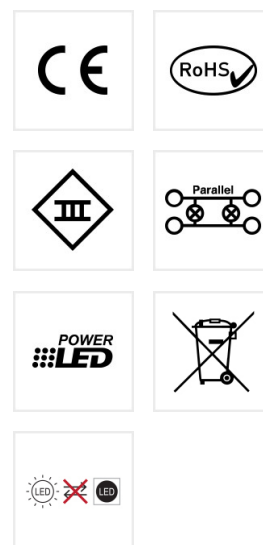




VARDAflex Osmium SVQ 3000K LD S?- ?? Flex.LEDStrip, 24V, WW

Article nr.: S71635

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	140
Dimension of segments	50.00 mm
CRI	≥ 90
Lifetime L70B50	54.000 h
Suitable light source	

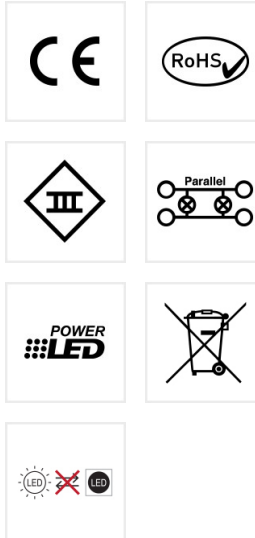



**VARDAflex Osmium SVQ 3000K LD S?-
?? Flex.LEDStrip, 24V, WW**
Article nr.: S71635

TECHNICAL DRAWING

