




VARDAflex Osmium TVQ 2400K LD S?- ?? Flex.LEDStrip, 24V, UWW

Article nr.: S71642

flexible LED Stripe sealed in UV- and · saltwater resistant white silicone · for indoor- and outdoor use, IP65 · · cuttable every 50 mm / 7 LEDs · amount of LEDs per meter: 140 · LED pitch: 7.14 mm · beam angle: 110° · CRI: >90 · luminous flux per meter: 445 lm · power per meter: 13 W · lifetime L70B50: >= 50,000 h · WxH in mm: 16 x 16 · · temperature range: -20 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending radius vertical: 65 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094716428
Housing colour	Weiss
Width	16.00 mm
Height	16.00 mm
LED colour	ca. 2400K ultra warmweiß
Lightoutput per LED	3.18 lm
Lamp	including LED
IP rating	65
Psb	0,00 W

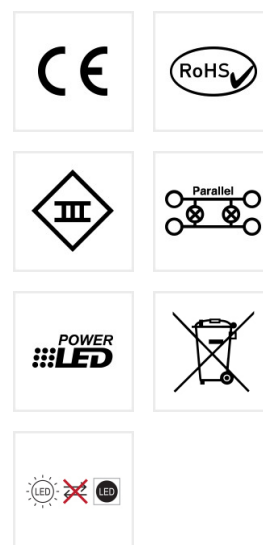




VARDAflex Osmium TVQ 2400K LD S?- ?? Flex.LEDStrip, 24V, UWW

Article nr.: S71642

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	140
Dimension of segments	50.00 mm
CRI	≥ 90
Lifetime L70B50	50.000 h
Suitable light source	





**VARDAflex Osmium TVQ 2400K LD S?-
?? Flex.LEDStrip, 24V, UWW**
Article nr.: S71642

TECHNICAL DRAWING

