

VARDAflex Osmium EXA TVQ 2700K LD ST-EK Flex.LEDStrip, 24V, UWW

Article nr.: S71693

flexible LED Stripe sealed in UV- and saltwater resistant white silicone · for indoor- and outdoor use, IP65 · cuttable every 25 mm / 7 LEDs · amount of LEDs per meter: 280 · LED pitch: 3.57 mm · beam angle: 120° · CRI: >90 · luminous flux per meter: 430 lm · power per meter: 7.2 W · lifetime L70B50: >= 36.000 h · LxWxH in mm: 5,000 x 6 x 6 · temperature range: -30 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 5 meter · bending radius vertical: 20 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094716930
Housing colour	Weiss
Length	5000.00 mm
Width	6.00 mm
Height	6.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per fixture	2150.00 lm
Lightoutput per LED	1.53 lm
Lamp	including LED




VARDAflex Osmium EXA TVQ 2700K LD ST-EK Flex.LEDStrip, 24V, UWW

Article nr.: S71693

TECHNICAL DATA

IP rating	65
Psb	0,0 W
Voltage	24 V
Amount of LED	1400
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	280
Dimension of segments	25.00 mm
CRI	≥ 90
Lifetime L70B50	36.000 h
Suitable light source	

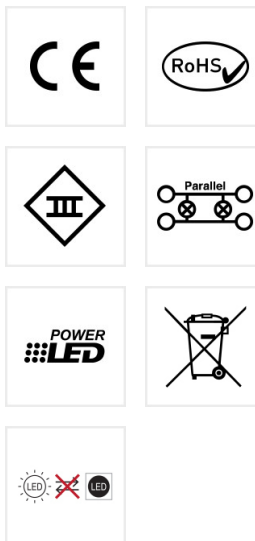

VARDAflex Osmium EXA TVQ 2700K LD ST-EK Flex.LEDStrip, 24V, UWW

Article nr.: S71693

TECHNICAL DRAWING

