




## **VARDAflex Platin RGBW-30K DMX-SIX LD S?-?? Flex.LEDStrip, 24V, RGBW**

Article nr.: S76005

Flexible LED Stripe sealed in UV-, Chlorine-, · salt water- and solvent resitant white silicone · for indoor- and outdoor use, IP68 · each individual segment separately programmable · and individually controllable · cuttable every 166.67 mm / 10 LEDs · ammount of LEDs per meter: 60 · IC type: DMX512CN · LED pitch: 16.67 mm · beam angle: 120° · luminous flux per meter: 200 lm · power per meter: 15 W · lifespan L70B50: >= 36,000 h · WxH in mm: 11.5 x 21 · · ambient working temperature: - 40 bis +50°C · ambient installation temperature: +10 bis +50°C · maximum length per connection: 10 meter at static colours · maximum length per connection: 15 meter at dynamic running light effect · bending radius horizontal: 60 mm · Attention: do not run all at same time on · maximum load (max. 80%)

### **TECHNICAL DATA**

|                |               |
|----------------|---------------|
| Unit Code      | metre         |
| BAR code       | 4012094060057 |
| Housing colour | Weiss         |
| Width          | 11.50 mm      |
| Height         | 21.00 mm      |
| LED colour     | RGBW 3000K    |
| Lamp           | including LED |
| IP rating      | 68            |
| Voltage        | 24 V          |
| Material       | Kunststoff    |

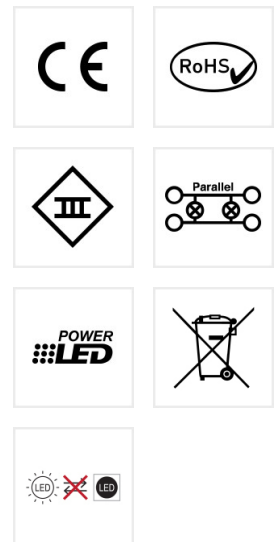



**VARDAflex Platin RGBW-30K DMX-SIX**  
**LD S?-?? Flex.LEDStrip, 24V, RGBW**  
Article nr.: S76005

## TECHNICAL DATA

|                       |           |
|-----------------------|-----------|
| Temperature range     | -40 - 50  |
| LED per meter         | 60        |
| Dimension of segments | 166.67 mm |
| CRI                   | ≥ 80      |
| Lifetime L70B50       | 36.000 h  |
| Suitable light source |           |





**VARDAflex Platin RGBW-30K DMX-SIX**  
**LD S?-?? Flex.LEDStrip, 24V, RGBW**  
Article nr.: S76005

## TECHNICAL DRAWING

