


VARDAflex Platin TVQ RGBW-27K Int.12 LD DIS S?-?? Flex.LEDStrip, 24V, RGBW

Article nr.: S76088

Flexible LED Stripe sealed in UV-, Chlorine-, · salt water- and solvent resitant white silicone · for indoor- and outdoor use, IP68 · · cuttable every 83.33 mm / 7 LEDs · amount of LEDs per meter: 84 · programmable pixel per meter: 12 · LED pitch: 11.90 mm · beam angle: 120° · CRI: >80 · light colour: RGBW (2700 K) · luminous flux per metre: 200 lm · power per meter: 22 W · lifespan L70: >= 36.000 h · WxH in mm: 16 x 17 · · temperature range: -40 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 8 meter · bending radius vertical: 150 mm · Attention: do not run all at same time on · maximum load (max. 80%)

TECHNICAL DATA

Unit Code	metre
BAR code	4012094060880
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	RGBW 2700K
Lightoutput per LED	2.38 lm
Lamp	including LED
IP rating	68
Voltage	24 V

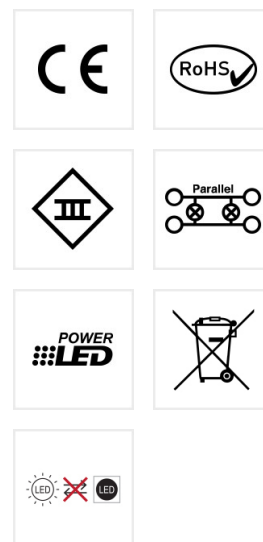


VARDAflex Platin TVQ RGBW-27K Int.12 LD DIS S?-?? Flex.LEDStrip, 24V, RGBW

Article nr.: S76088

TECHNICAL DATA

Material	Kunststoff
Temperature range	-40 - 45
LED per meter	84
Dimension of segments	83.33 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

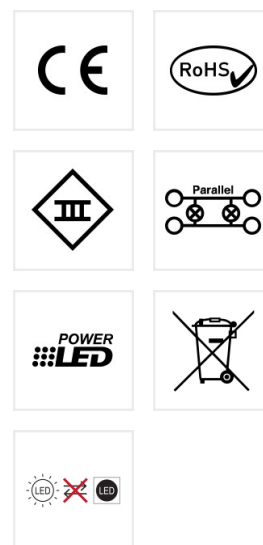

VARDAflex Platin TVQ RGBW-27K Int.12 LD DIS S?-?? Flex.LEDStrip, 24V, RGBW

Article nr.: S76088

TECHNICAL DRAWING

