



## **VARDAflex Platin SVQ - 2700K LD S?-??**


### **Flex.LEDStrip, 24V, UWW**

Article nr.: S76163

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · Cuttable every 55.56 cm / 6 LEDs · Amount of LEDs per meter: 108 · LED pitch: 9.26 mm · Beam angle: 160° · CRI: >80 · Luminous flux per meter: 495 lm · Voltage: 24V DC · Power per Meter: 12 W · Lifetime L70: >= 36.000 h · WxH in mm: 16 x 17 · Temperature range: -40 to +55°C · Processing temperature: +10 to +55°C · Maximum length per connection: 10 meter · Bending radius: 150 mm · Easy Connection with solderless connector.

#### **TECHNICAL DATA**

|                     |                          |
|---------------------|--------------------------|
| Unit Code           | metre                    |
| BAR code            | 4012094661636            |
| Housing colour      | Weiss                    |
| Width               | 16.00 mm                 |
| Height              | 17.00 mm                 |
| LED colour          | ca. 2700K ultra warmweiß |
| Lightoutput per LED | 4.60 lm                  |
| Lamp                | including LED            |
| IP rating           | 68                       |
| Voltage             | 24 V                     |

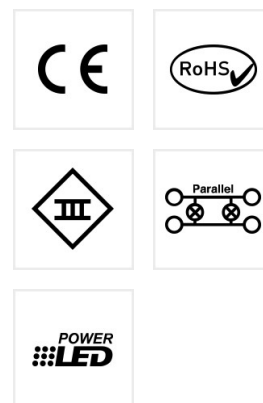




**VARDAflex Platin SVQ - 2700K LD S?-??**  
**Flex.LEDStrip, 24V, UWW**  
Article nr.: S76163

## TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| Material              | Kunststoff |
| Temperature range     | -40 - 55   |
| LED per meter         | 108        |
| Dimension of segments | 55.56 mm   |
| CRI                   | ≥ 80       |
| Lifetime L70B50       | 36.000 h   |
| Suitable light source |            |





**VARDaflex Platin SVQ - 2700K LD S?-??**  
**Flex.LEDStrip, 24V, UWW**  
Article nr.: S76163

## TECHNICAL DRAWING

