




VARDAflex Platin SV Single - 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S76643

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · cuttable every 16.67 mm / each LED · number of LEDs per meter: 60 · LED pitch: 16.67 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 334 lm · voltage: 24V DC · power per meter: 9 W · lifespan L70B50: >= 36,000 h · WxH in mm: 11.5 x 21 · Temperature range: -40 to +60° C · Processing temperature: +10 to +60° C · Maximum length per connection: 18 meter · Bending radius horizontal: 60 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094666433
Housing colour	Weiss
Width	11.50 mm
Height	21.00 mm
LED colour	ca. 2700K ultra warmweiß
Lamp	including LED
IP rating	68
Voltage	24 V
Material	Kunststoff

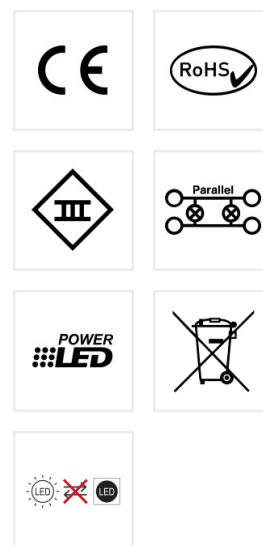




VARDAflex Platin SV Single - 2700K LD

S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S76643

TECHNICAL DATA

Temperature range	-40 - 60
LED per meter	60
Dimension of segments	16.67 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	





VARDAflex Platin SV Single - 2700K LD
S?-?? Flex.LEDStrip, 24V, UWW
Article nr.: S76643

TECHNICAL DRAWING

