rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Platin SVQ Single - 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S76673

Flexible LED Stripe sealed in UV-, chlorine-, · salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP67/68 · · cuttable every 18.52 mm / 2 LEDs · amount of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 750 lm · voltage: 24V DC · power per meter: 12W · lifespan L70B50: >= 36,000 h · WxH in mm: 16 x 17 · · temperature range: -40 to +55°C · installation temperature: +10 to +55°C · maximum length per connection: 15 meter · Bending radius horizontal: 150 mm · This product contains a light source of energy efficiency class E.

TECHNICAL DATA

Unit Code	metre
BAR code	4012094666730
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	6.94 lm
Lamp	including LED
IP rating	68
Voltage	24 V

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Platin SVQ Single - 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S76673

TECHNICAL DATA

Material	Kunststoff
Temperature range	-40 - 55
LED per meter	108
Dimension of segments	18.52 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Platin SVQ Single - 2700K LD S?-?? Flex.LEDStrip, 24V, UWW

Article nr.: S76673
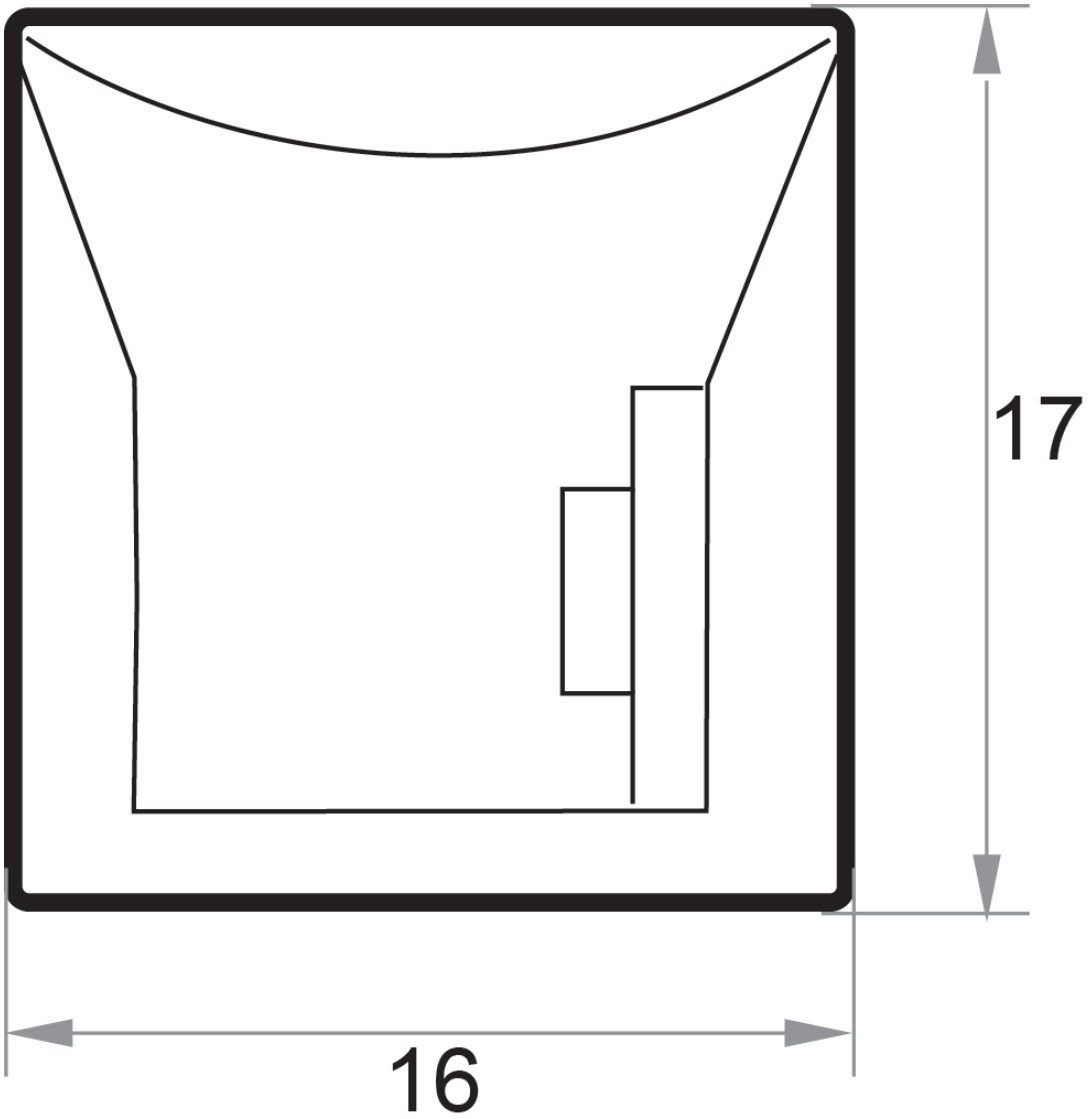
TECHNICAL DRAWING