




VARDAflex Platin Piko TVQ Single - 3000K LD S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S76695

flexible LED stripe sealed in UV-, chlorine-, · salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP66 · · cuttable every 13.89 mm / 2 LEDs · amount of LEDs per meter: 144 · LED pitch: 6.94 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 315 lm · Voltage: 24V DC · power per meter: 4.5 W · lifespan L70B50: >= 36,000 h · WxH in mm: 10 x 10 · · temperature range: -40 to +60°C · processing temperature: +10 to +60°C · maximum length per connection: 10 meter · bending radius vertical: 50 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094666952
Housing colour	Weiss
Width	10.00 mm
Height	10.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per LED	2.19 lm
Lamp	including LED
IP rating	66
Voltage	24 V






VARDAflex Platin Piko TVQ Single - 3000K LD S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S76695

TECHNICAL DATA

Material	Kunststoff
Temperature range	-40 - 60
LED per meter	144
Dimension of segments	13.89 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

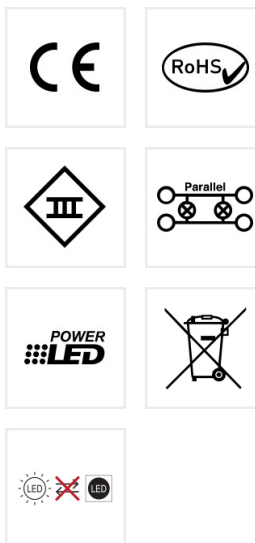



**VARDAflex Platin Piko TVQ Single -
3000K LD S?-?? Flex.LEDStrip, 24V, WW**
Article nr.: S76695

TECHNICAL DRAWING

