




VARDAflex Platin SVQ - 2700K LD S?-?? Flex.LEDStrip, 24V, UWW CRI95 Article nr.: S76773

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · cuttable every 55.56 mm / 6 LEDs · number of LEDs per meter: 108 · LED pitch: 9.26 mm · beam angle: 120° · CRI: >95 · luminous flux per meter: 610 lm · voltage: 24 V DC · power per Meter: 12 W · lifetime L70B50: >= 36,000 h · WxH in mm: 16 x 17 · Temperature range: -40 to +55°C · Processing temperature: +10 to +55°C · Maximum length per connection: 15 meter · Bending radius horizontal: 150 mm · This product contains a light source of energy efficiency class G

TECHNICAL DATA

Unit Code	metre
BAR code	4012094767734
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	5.64 lm
Lamp	including LED
IP rating	68
Voltage	24 V






VARDaflex Platin SVQ - 2700K LD S?-??
Flex.LEDStrip, 24V, UWW CRI95
 Article nr.: S76773

TECHNICAL DATA

Material	Kunststoff
Temperature range	-40 - 55
LED per meter	108
Dimension of segments	55.56 mm
CRI	≥ 95
Lifetime L70B50	36.000 h
Suitable light source	

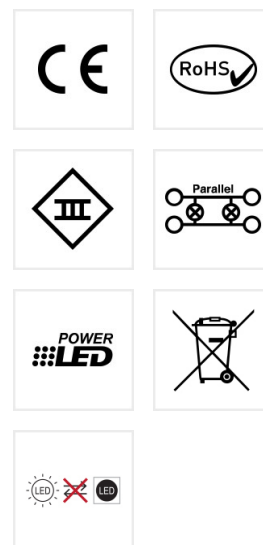



VARDaflex Platin SVQ - 2700K LD S?-??
Flex.LEDStrip, 24V, UWW CRI95
Article nr.: S76773

TECHNICAL DRAWING

