



VARDAflex Platin Q 3D RGBW 2700K
int.12 LD ST-EK Flex.LEDStrip, 24V,
RGBW-27 int.TWELVE 3D
 Article nr.: S76871

flexible LED Stripe sealed in UV-, chlorine-, · salt water- and solvent resistant white silicone · for indoor and outdoor use, IP68 · cuttable every 83.33 mm / 7 LEDs · number of LEDs per meter: 84 · LED pitch: 11.91 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 865 lm · luminous flux per meter 2700 K: 333 lm · pixel per meter: 12 · IC type: UCS2904 · power per meter: 22 W · energy efficiency class: G · lifespan L70B50: >= 36,000 h · WxH in mm: 16 x 17 · temperature range: -40 to +45°C · processing temperature: +10 to +45°C · maximum length per connection: 6 meter · bending radius: 150 mm · attention: do not run all colors at same time on · maximum load (max. 80%)

TECHNICAL DATA

Unit Code	metre
BAR code	4251835768719
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	RGBW 2700K
Lightoutput per LED	10.18 lm
Lamp	including LED
IP rating	68
Psb	






VARDAflex Platin Q 3D RGBW 2700K
int.12 LD ST-EK Flex.LEDStrip, 24V,
RGBW-27 int.TWELVE 3D
 Article nr.: S76871

TECHNICAL DATA

Pno	
Pnet	
Voltage	24 V
Material	Kunststoff
Temperature range	-40 - 45
LED per meter	84
Dimension of segments	83.33 mm
Energy efficiency class	EEK-Label_G
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

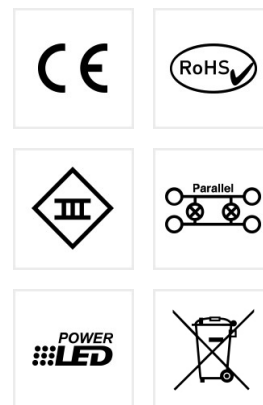



VARDaflex Platin Q 3D RGBW 2700K
int.12 LD ST-EK Flex.LEDStrip, 24V,
RGBW-27 int.TWELVE 3D
 Article nr.: S76871

TECHNICAL DRAWING

