




VARDAflex Platin Q 3D 2700K LD ST-EK Flex.LEDStrip, 24V, UWW 3D

Article nr.: S76873

Flexible LED Stripe sealed in UV-, chlorine-, salt water-, solvent- and heat-resistant special silicone · for indoor- and outdoor use, IP68 · cuttable every 55.56 mm / 7 LEDs · number of LEDs per meter: 126 · LED pitch: 7.94 mm · beam angle: 120° · CRI: >80 · luminous flux per meter: 780 lm · voltage: 24V DC · power per meter: 12 W · lifespan L70B50: >= 36,000 h · energy efficiency class: G · WxH in mm: 16 x 17 · Temperature range: -45 to +55° C · Processing temperature: +10 to +55° C · Maximum length per connection: 10 meter · Bending radius horizontal/vertical: 150 mm · INFO: Binning S76873/AB2BG/1233 NO cutting marks · Binning S76873/AB2BG/0792 WITH cutting marks

TECHNICAL DATA

Unit Code	metre
BAR code	4251835768375
Housing colour	Weiss
Width	16.00 mm
Height	17.00 mm
LED colour	ca. 2700K ultra warmweiß
Lightoutput per LED	6.19 lm
Lamp	including LED
IP rating	68
Voltage	24 V

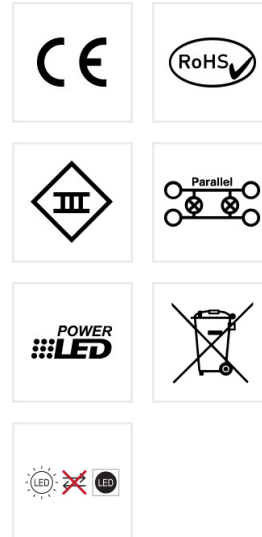




VARDAflex Platin Q 3D 2700K LD ST-EK Flex.LEDStrip, 24V, UWW 3D

Article nr.: S76873

TECHNICAL DATA

Material	Kunststoff
Temperature range	-45 - 55
LED per meter	126
Dimension of segments	55.56 mm
Energy efficiency class	EEK-Label_G
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

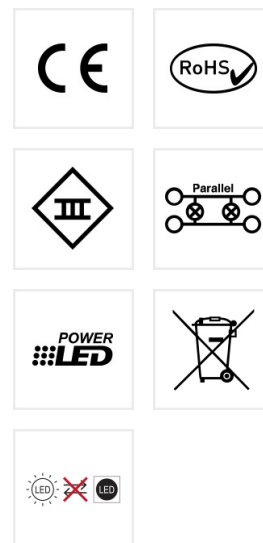



VARDAflex Platin Q 3D 2700K LD ST-EK
Flex.LEDStrip, 24V, UWW 3D
Article nr.: S76873

TECHNICAL DRAWING

