




VARDAflex Platin Piko Ultra TVQ Single-30K LD S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S76965

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white silicone · for indoor- and outdoor use, IP67 · · cuttable every 20.83 mm or 3 LED · number of LED per metre: 144 · LED pitch: 6.94 mm · beam Angle: 120° · CRI: > 80 · luminous flux per meter: 695 lm · power per meter: 9 W · lifespan L70B50: >= 36.000 h · WxH in mm: 10 x 10 · · Temperature range: -40 bis +60°C · Processing temperature: +10 bis +60°C · Maximum length per connection: 7.5 metres · vertical bending radius: 50 mm · This product contains a light source of energy efficiency class E

TECHNICAL DATA

Unit Code	metre
BAR code	4251835769655
Housing colour	Weiss
Width	10.00 mm
Height	10.00 mm
LED colour	ca. 3000K warmweiß
Lightoutput per LED	4.83 lm
Lamp	including LED
IP rating	67
Voltage	24 V






VARDAflex Platin Piko Ultra TVQ Single-30K LD S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S76965

TECHNICAL DATA

Material	Kunststoff
Temperature range	40 - 60
LED per meter	144
Dimension of segments	20.83 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

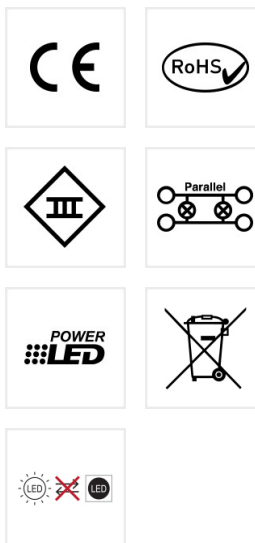



VARDAflex Platin Piko Ultra TVQ Single-30K LD S? Flex.LEDStrip, 24V, WW
Article nr.: S76965

TECHNICAL DRAWING

