




## VARDAflex Neon Select 2200-3500K LD S?-?? Flex.LED Strip, 24V, UWW-WW Article nr.: S86008

Flexible LED Stripe sealed in UV-, chlorine-, · salt water- and solvent resistant white PVC · for indoor- and outdoor use, IP68 · Cuttable every 83.33 mm / 12 LEDs · Amount of LEDs per metre: 144 · LED pitch: 6.94 mm · Beam angle: 120° · CRI: >80 · Light flux per meter: 265 lm · Voltage: 24 V DC · Power per metre: 12 W · Lifetime L70: >= 36.000 h · WxH in mm: 11.5 x 21 · Temperature range: -20 to +45°C · Processing temperature: +10 to +45°C · Maximum length per connection: 8 metres · bending radius: 60 mm horizontally

### TECHNICAL DATA

|                     |                              |
|---------------------|------------------------------|
| Unit Code           | metre                        |
| BAR code            | 4012094860084                |
| Width               | 11.50 mm                     |
| Height              | 21.00 mm                     |
| LED colour          | ca. 2200-3500K tunable white |
| Lightoutput per LED | 1.84 lm                      |
| Lamp                | including LED                |
| IP rating           | 68                           |
| Voltage             | 24 V                         |
| Temperature range   | -20 - 45                     |

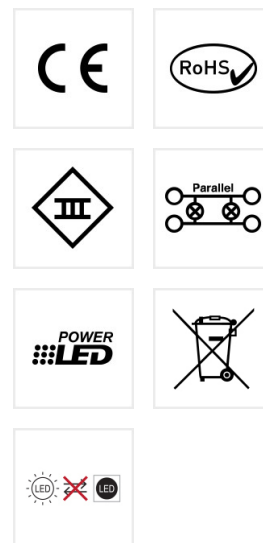



**VARDAflex Neon Select 2200-3500K LD**  
**S?-?? Flex.LED Strip, 24V, UWW-WW**  
Article nr.: S86008

## TECHNICAL DATA

|                       |          |
|-----------------------|----------|
| LED per meter         | 144      |
| Dimension of segments | 83.33 mm |
| CRI                   | ≥ 80     |
| Lifetime L70B50       | 36.000 h |
| Suitable light source |          |





**VARDAflex Neon Select 2200-3500K LD**  
**S?-?? Flex.LED Strip, 24V, UWW-WW**  
Article nr.: S86008

## TECHNICAL DRAWING

