rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Neon Mini - 3500K S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S86235

Flexible LED Stripe sealed in UV-, chlorine-, · salt water-, solventresistant white PVC · for indoor- and outdoor use, IP67/68 · · Cuttable every 83.33 mm / 6 LEDs · Amount of LEDs per meter: 72 · LED pitch: 13.89 mm · Beam angle: 160° · CRI: >80 · Luminous flux per meter: 120 lm · Voltage: 24V DC · Power per Meter: 5 W · Lifetime L70: >= 36.000 h · WxH in mm: 9 x 18 · · Temperature range: -20 to +45°C · Processing temperature: +10 to +45°C · Maximum length per connection: 15 meter · Bending radius: 90 mm · anti-wicking ferrule diameter = 12 mm: the anti-wicking ferrule is located at · 115 mm from the connector on the cable. · the anti-wicking ferrule is not included in the rutec Lightdesign version.

TECHNICAL DATA

Unit Code	metre
BAR code	4012094762357
Housing colour	Weiss
Width	9.00 mm
Height	18.00 mm
LED colour	ca. 3500 K warmweiß
Lightoutput per LED	1.67 lm
Lamp	including LED
IP rating	68
Voltage	24 V

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Neon Mini - 3500K S?-?? Flex.LEDStrip, 24V, WW

Article nr.: S86235

TECHNICAL DATA

Material	Kunststoff
Temperature range	-20 - 45
LED per meter	72
Dimension of segments	83.33 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Neon Mini - 3500K S?-??
Flex.LEDStrip, 24V, WW

Article nr.: S86235
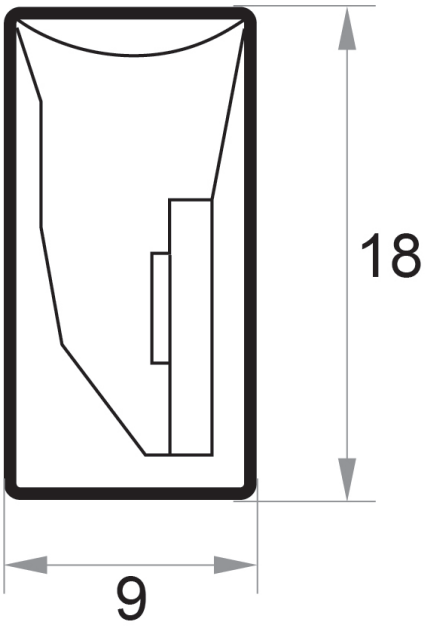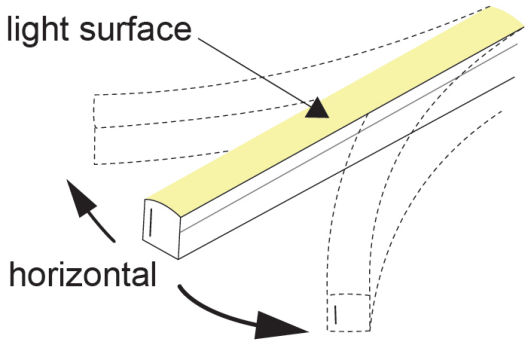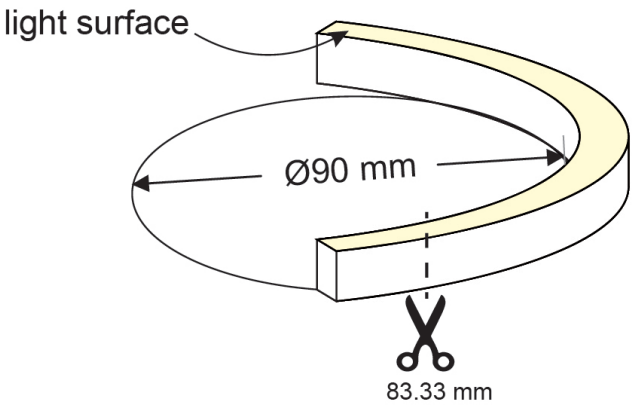
TECHNICAL DRAWING