




VARDAflex Neon Piko - 2200K LD S?-?? Flex.LEDStrip, 24V, BRZ

Article nr.: S86619

Flexible LED-Strip sealed in UV, chlorine, salt water · and solvent-resistant white PVC · for indoor- and outdoor use, IP20/66 · · cuttable every 83.33 mm or 12 LED · Number of LED per metre: 144 · LED Pitch: 6.94 mm · Beam Angle: 160° · CRI: > 80 · Luminous flux per meter: 140 lm · Power per meter: 4.5 W · Lifespan L70: >= 36.000 h · WxH in mm: 10 x 10 · · Temperature range: -20 bis +45°C · Processing temperature: +10 bis +45°C · Maximum length per connection: 10 metres · Bending radius horizontal: 50 mm

TECHNICAL DATA

Unit Code	metre
BAR code	4012094766195
Housing colour	Weiss
Width	10.00 mm
Height	10.00 mm
LED colour	ca. 2200K bronze
Lightoutput per LED	0.97 lm
Lamp	without
IP rating	66
Psb	0,00 W

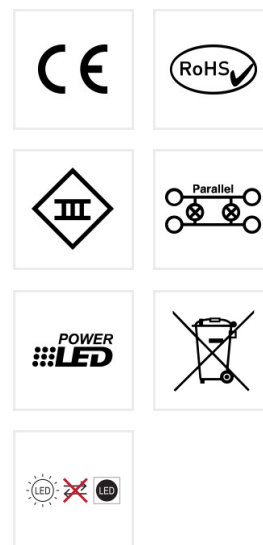




VARDAflex Neon Piko - 2200K LD S?-??

Flex.LEDStrip, 24V, BRZ

Article nr.: S86619

TECHNICAL DATA

Voltage	24 V
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	144
Dimension of segments	83.33 mm
CRI	≥ 80
Lifetime L70B50	36.000 h
Suitable light source	





VARDAflex Neon Piko - 2200K LD S?-??
Flex.LEDStrip, 24V, BRZ
Article nr.: S86619

TECHNICAL DRAWING

