




## 100V-277V LED Konverter 600mA 21W-25, 2W

Article nr.: 85980

rutec LED constant current converters · for indoor use · Built-in active power factor connection (active PFC) · IP64 · Protection Class 2, CE, RoHS, REACH · Protection against short-circuit, overtemperature and overcurrent · Primary and secondary-sided 1 supply and feed line · SECONDLIFE ITEM -heavily discounted- only while stocks last!

### TECHNICAL DATA

|                |               |
|----------------|---------------|
| Unit Code      | pcs           |
| BAR code       | 4012094859804 |
| Housing colour | Weiss         |
| Length         | 174.50 mm     |
| Width          | 30.50 mm      |
| Height         | 25.00 mm      |
| Lamp           | without       |
| IP rating      | 64            |
| Power          | 21-25,2 W     |
| Psb            | 0,00 W        |

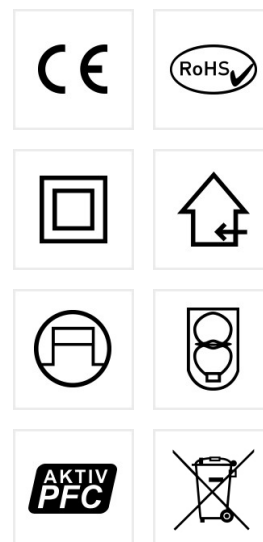



 Secondlife-Shop

## 100V-277V LED Konverter 600mA 21W-25, 2W

Article nr.: 85980

### TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| Pno                   | >0,5 W     |
| Current mA            | 600 mA     |
| Input voltage         | 100-240    |
| Output voltage        | 35-42      |
| Material              | Kunststoff |
| Tolerance             | 8.00       |
| Temperature range     | -20 - 50   |
| Suitable light source | LED        |

