




VARDAflex COB Plus Profi Select 2700-6500K Flex. LED-Strip, IP20, TW 2700-6500K, COB

Article nr.: 74369

mit selbstklebender Rückseite · für die Innenanwendung, IP20 · alle 62,5 mm / 32 LEDs teilbar · Anzahl der LEDs: 2560 · LED Abstand: 1,95 mm · Ausstrahlwinkel: 130° · CRI: >90 · Lichtstrom pro Meter: 1500 lm · Betriebsspannung: 24 V DC · Leistung pro Meter: 15 W · Lebensdauer L70B50: >= 36.000 h · Energieeffizienzklasse: F · LxBxH in mm: 5.000 x 10 x 2,9 · Achtung: LED-Strip nur mit Aluminiumprofil sowie · ausreichender Belüftung betreiben. · Maximale Länge pro Anschluss: 5 Meter. Für größere Längen neu einspeisen. · Lieferumfang: 5 Meter-Rolle mit 300 mm Anschlussleitung

TECHNICAL DATA

Unit Code	Stück
BAR code	4012094743691
Housing colour	Weiss
Length	5000.00 mm
Width	10.00 mm
Height	2.90 mm
LED colour	2700-6500K tunable white
Lightoutput per fixture	7500.00 lm
Lightoutput per LED	2.93 lm
Lamp	Inklusive LED






VARDAflex COB Plus Profi Select 2700-6500K Flex. LED-Strip, IP20, TW 2700-6500K, COB

Article nr.: 74369

TECHNICAL DATA

IP rating	20
Power	75 W
Psb	0,00 W
Current mA	3125 mA
Voltage	24 V
Amount of LED	2560
Temperature range	-20 - 40
LED per meter	512
Dimension of segments	62.50 mm
Energy efficiency class	EEK-Label_F
CRI	≥ 90
Lifetime L70B50	36.000 h
Lifetime L90B10	20.000 h



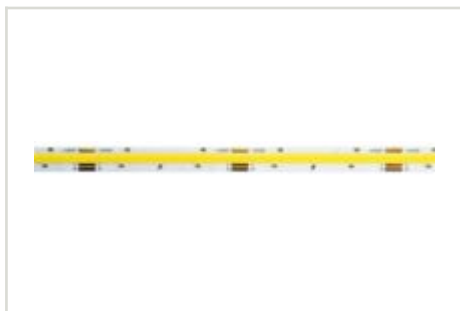

VARDAflex COB Plus Profi Select 2700-6500K Flex. LED-Strip, IP20, TW 2700-6500K, COB

Article nr.: 74369

TECHNICAL DRAWING

