




VARDAflex Eco Plus Profi IP67 - 5 M- Rolle Flex.LED Strip, 24V, 14, 4W/m, IP67, 2700K

Article nr.: 82077

Flexible LED Stripe sealed in transparent UV resistant silicone · for indoor and outdoor use, IP67 · with self adhesive backside · cuttable every 62.5 mm / 8 LEDs · amount of LEDs: 640 · LED pitch: 7.81 mm · beam angle: 120° · CRI: >90 · luminous flux per meter: 1355 lm · voltage: 24 V DC · power per meter: 14.4 W · lifespan L70B50: >= 50,000 h · energy efficiency class: F · LxWxH in mm: 5.000 x 12 x 4.6 · Maximum length per connection: 5 meter. New connectors for greater length. · Delivery contents: 5 meter roll with 300 mm connection cable, · 10 x mounting bracket

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094820774
Housing colour	Weiss
Length	5000.00 mm
Width	12.00 mm
Height	4.60 mm
LED colour	ca. 2700 K ultra warmweiß
Lightoutput per fixture	6775.00 lm
Lightoutput per LED	10.59 lm
Lamp	Inklusive LED

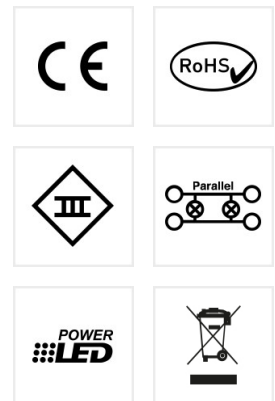



VARDAflex Eco Plus Profi IP67 - 5 M- Rolle Flex.LED Strip, 24V, 14, 4W/m, IP67, 2700K

Article nr.: 82077

TECHNICAL DATA

IP rating	67
Power	72 W
Psb	0,0 W
Current mA	3.000 mA
Voltage	24 V
Amount of LED	640
Material	Kunststoff
Temperature range	-20 - 45
LED per meter	128
Dimension of segments	62.50 mm
Energy efficiency class	EEK-Label_F
CRI	≥ 90
Lifetime L70B50	50.000 h





**VARDAflex Eco Plus Profi IP67 - 5 M-
Rolle Flex.LED Strip, 24V, 14, 4W/m,
IP67, 2700K**

Article nr.: 82077

TECHNICAL DRAWING

