rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Superior Plus Profi REACH10 M Flex.LEDStrip, 24V, Innen, 2400K CRI98

Article nr.: 79322

flexible LED Strip with self adhesive backside, · for indoor use. · · can be seperated every 8.33 cm or 5 LEDs · number of LEDs: 600 · LED pitch: 16.67 mm · beam angle: 120° · CRI: 98 · IC module on board (constant current module) · lumen per meter: 773 lm · voltage: 24V DC · power per meter: 14,4 W · lifetime L70: >= 50.000h · energy efficiency class: A · LxWxH in mm: 10.000 x 10 x 1,6 · · Easy installation with solderless connector (optional). · Maximum length per connection: 10 meter. New connectors for greater length. · Delivery contents: 10 meter roll

TECHNICAL DATA

Unit Code	pcs
BAR code	4012094793221
Housing colour	Weiss
Length	10000.00 mm
Width	10.00 mm
Height	1.60 mm
LED colour	ca. 2400K ultra warmweiß
Lightoutput per fixture	7730.00 lm
Lightoutput per LED	12.88 lm
Lamp	including LED

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE

VARDAflex Superior Plus Profi REACH10 M Flex.LEDStrip, 24V, Innen, 2400K CRI98

Article nr.: 79322

TECHNICAL DATA
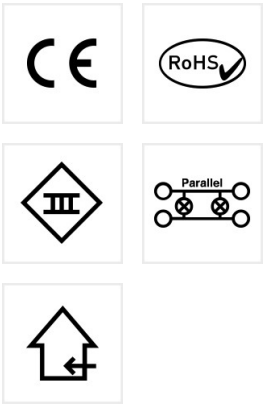
IP rating	20
Power	144 W
Current mA	6000 mA
Voltage	24 V
Amount of LED	600
Temperature range	-20 - 45
LED per meter	60
Dimension of segments	83.33 mm
CRI	≥ 98
Suitable light source