**rutec LIGHTDESIGN GmbH** | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




# VARDAflex Slim Bronze 10W 5M-R. Flex.LEDStrip, 24V, Innen, 2400K CRI90

Article nr.: 84607

flexible LED Strip with self adhesive backside, · for indoor use. · · Can be seperated every 5 cm or 7 LEDs · Number of LEDs: 700 · LED pitch: 7.14 mm · beam angle: 120° · CRI: >90 · Lumen per meter: 899 lm · Voltage: 24V DC · Power per meter: 10 W · Lifetime L70B50: >= 60.000h · energy efficiency class: G · LxWxH in mm: 5.000 x 3.5 x 1.2 · · Caution: Do not operate strip without aluminium profile · and adequate ventilation. · Maximum length per connection: 5 meter. New connectors for greater length. · Delivery contents: 5 meter roll · · SECONDLIFE ITEM -heavily discounted- only while stocks last!

## TECHNICAL DATA

| | |
|---|---|
| Unit Code | pcs |
| BAR code | 4012094846071 |
| Housing colour | Weiss |
| Length | 5000.00 mm |
| Width | 3.50 mm |
| Height | 1.20 mm |
| LED colour | ca. 2400K ultra warmweiß |
| Lightoutput per fixture | 4495.00 lm |
| Lightoutput per LED | 6.42 lm |
| Lamp | including LED |

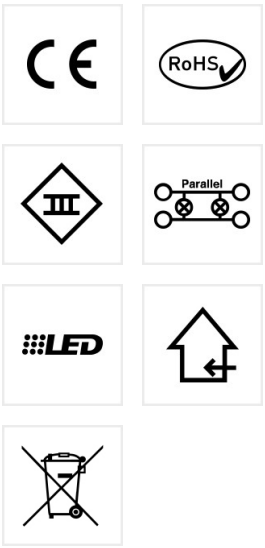

**rutec LIGHTDESIGN GmbH** | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




# VARDAflex Slim Bronze 10W 5M-R. Flex.LEDStrip, 24V, Innen, 2400K CRI90

Article nr.: 84607

## TECHNICAL DATA

| | |
|---|---|
| IP rating | 20 |
| Power | 50 W |
| Current mA | 2083 mA |
| Voltage | 24 V |
| Amount of LED | 700 |
| Temperature range | -20 - 45 |
| LED per meter | 140 |
| Dimension of segments | 50.00 mm |
| Energy ffficiency class | EEK-Label_G |
| CRI | ≥ 90 |
| Lifetime L70B50 | 60.000 h |
| Suitable light source | |

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




# VARDAflex Slim Bronze 10W 5M-R. Flex.LEDStrip, 24V, Innen, 2400K CRI90

Article nr.: 84607

## TECHNICAL DRAWING

